



4. Rear Bumper

A: REMOVAL AND INSTALLATION

- 1) Disconnect the ground cable from the battery.
- 2) Open rear gate.
- 3) Remove five screws from upper side of bumper.

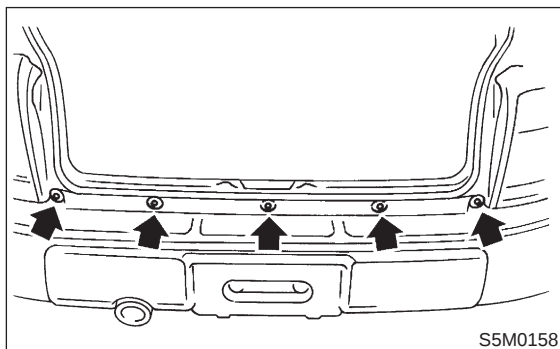


- 4) Disconnect license plate light connector.
- 5) Remove bolts and clips from under side of bumper.

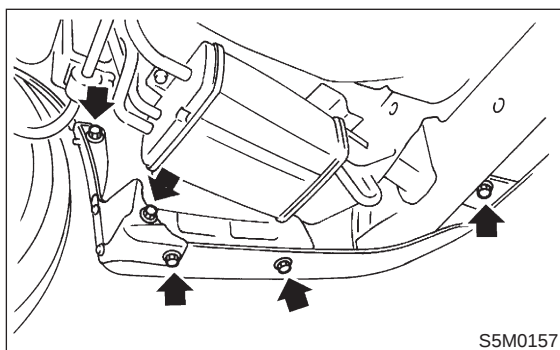

- 6) Remove bumper face and E/A form.
- 7) Remove canister. <Ref. to 2-1 [W3A0].>

- 8) Remove bolts from bumper stay.

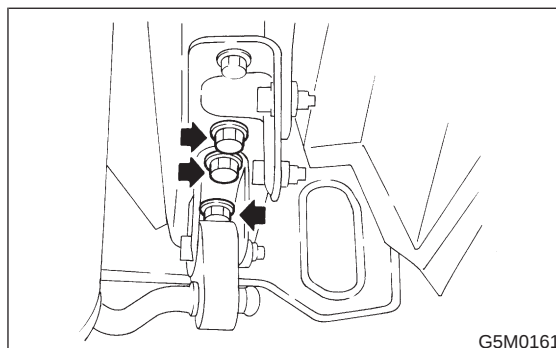

- 9) Remove rear bumper beam.
- 10) Installation is in the reverse order of removal.

CAUTION:

- Be extremely careful to prevent scratches on bumper face as it is made of resin.
- Be careful not to scratch the body when removing or installing bumper.