


14. Roof Rail

A: REMOVAL AND INSTALLATION

1) Remove roof trim.

2) Remove seven attaching bolts and then carefully detach roof rail.

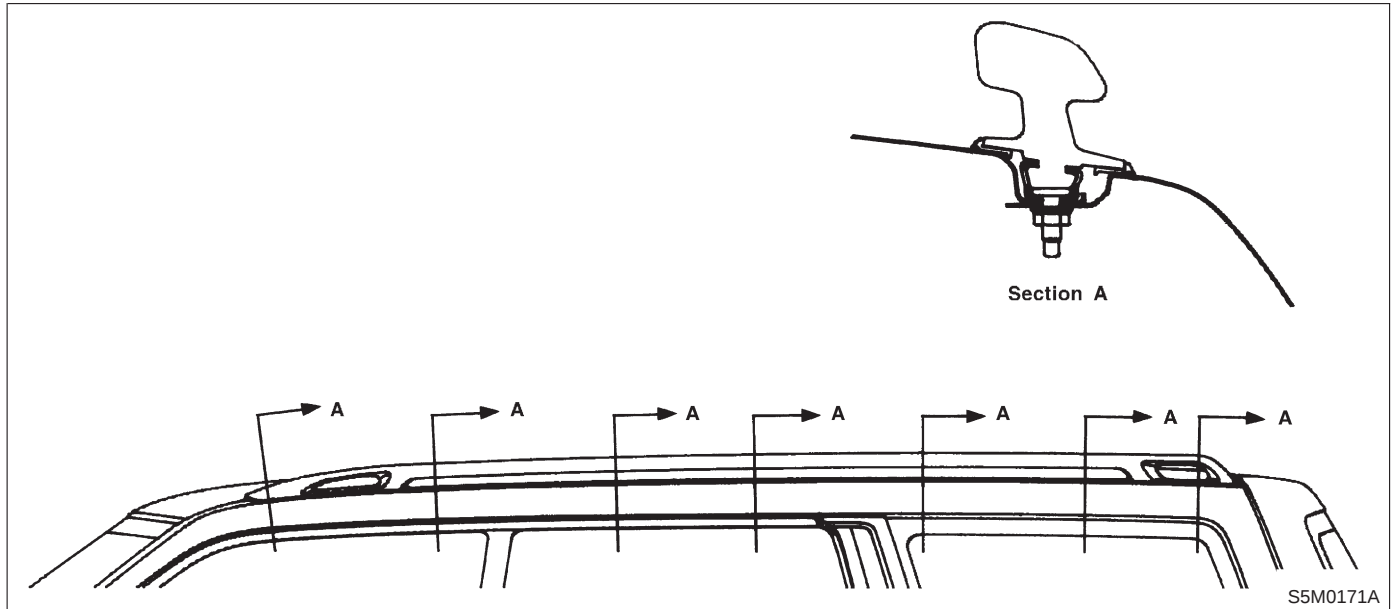

3) Installation is in the reverse order of removal.

CAUTION:

Be careful not to scratch body panels with roof rail stud bolts when removing and installing them.

MEMO: