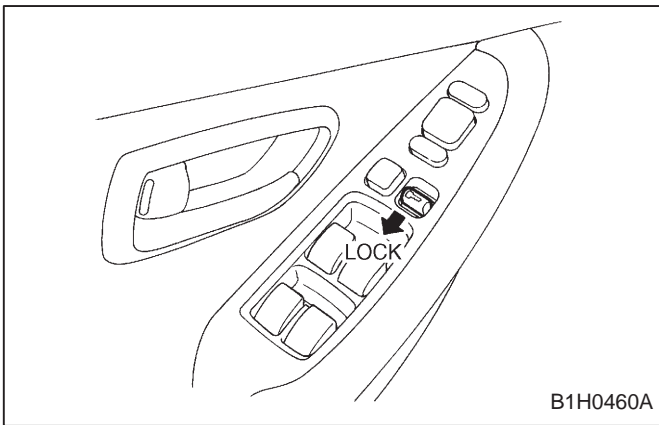


1-4 [G2V0]**2. Pre-road Test Inspection****PRE-DELIVERY INSPECTION**

9) Unlock a door using the inner lock knob or the key and open the door while the security system is in the arming state. Check to ensure that the alarming condition occurs, i.e. the horn sounds continuously, the parking lights flash and the security indicator light flashes rapidly, and that it lasts for 30 seconds or until the "UN-LOCK/DISARM" button on the transmitter is pressed. Also, check to ensure that turning the ignition key to the "START" position in the arming state does not cause the starter motor to turn, thus the engine being prevented from starting.

10) Apply a shock to the vehicle body with the security system in arming state, and check to ensure that the alarming condition occurs.

11) Troubleshoot the security system if any one of the above-mentioned checks does not meet the requirements. <Refer to 6-2c [T100].>

V: BUILT-IN CHILD RESTRAINT**CHECK POINT**

1. Check installed "OPERATING INSTRUCTIONS FOR BUILT-IN CHILD RESTRAINT" to built-in child restraint

