

# BACK-UP LIGHT SYSTEM

LIGHTING SYSTEM

## 5. Back-up Light System

### A: SCHEMATIC


#### 1. BACK-UP LIGHT

<Ref. to WI-126, SCHEMATIC, Back-up Light System.>

### B: INSPECTION

#### 1. BACK-UP LIGHT SWITCH (MT MODEL)

Measure the back-up light switch resistance.

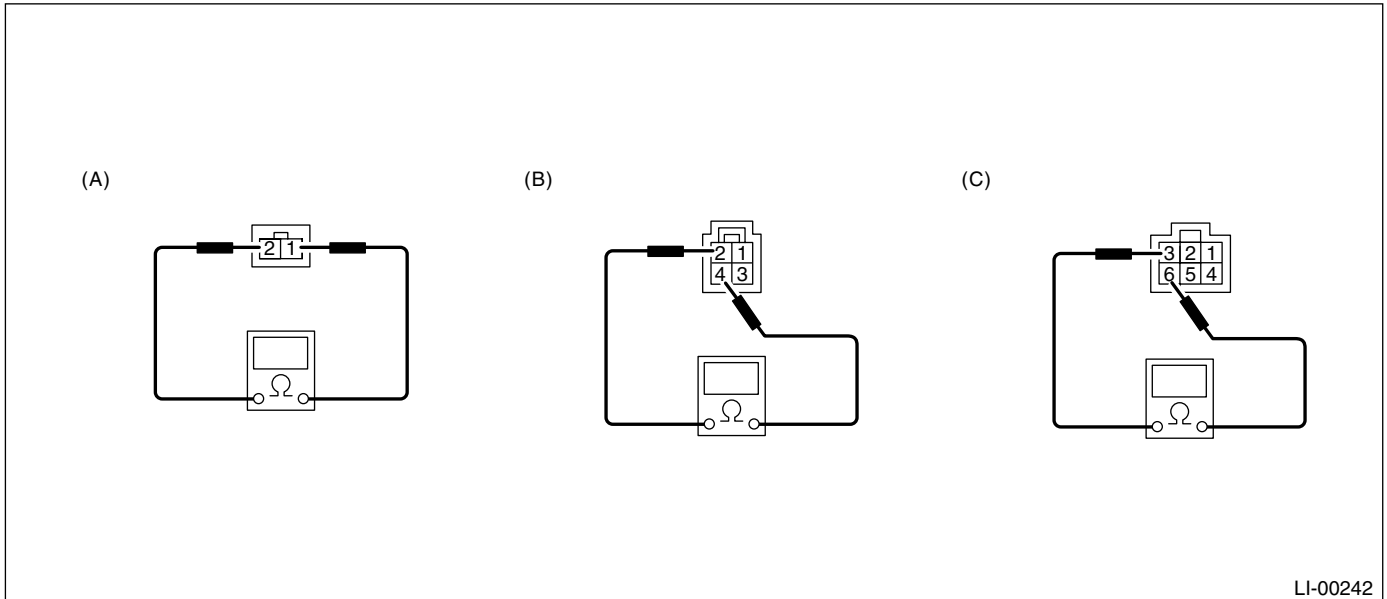

LI-00242

(A) Non-turbo model


(B) Turbo model (Except STi model)

(C) Turbo model (STi model)

Switch position	Terminal No.	Standard
When shift lever is set in reverse position	Turbo model (Except STi model): 2 and 4	Less than 1 $\Omega$
Other positions	Turbo model (STi model): 3 and 6 Non-turbo model: 1 and 2	More than 1 M $\Omega$

#### 2. INHIBITOR SWITCH (AT MODEL)

Measure the inhibitor switch resistance.

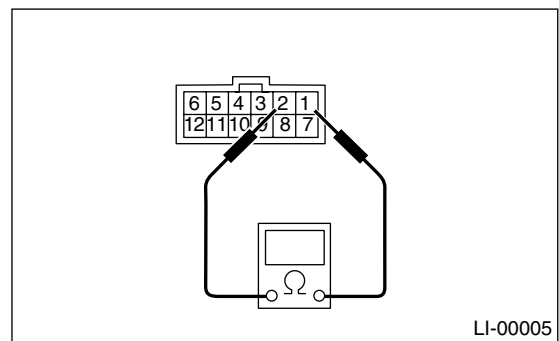

LI-00005

Switch position	Terminal No.	Standard
When select lever is set in "R" range	1 and 2	Less than 1 $\Omega$
Other positions		More than 1 M $\Omega$