



- |  |                            |                            |
|--|----------------------------|----------------------------|
| (1) Heat sealed cover                          | (13) Fuel cut valve        | (26) Fuel pipe ASSY        |
| (2) Fuel tank band                             | (14) Evaporation hose C    | (27) Jet pump hose B       |
| (3) Protector LH                               | (15) Evaporation hose A    | (28) Fuel return hose B    |
| (4) Protector RH                               | (16) Clip                  | (29) Evaporation hose F    |
| (5) Fuel tank                                  | (17) Joint pipe            | (30) Fuel sub meter gasket |
| (6) Pressure control solenoid valve<br>bracket | (18) Evaporation hose B    | (31) Jet pump filter       |
| (7) Pressure control solenoid valve            | (19) Evaporation pipe ASSY | (32) Fuel sub meter unit   |
| (8) Evaporation hose G                         | (20) Evaporation hose D    |                            |
| (9) Evaporation pipe A                         | (21) Evaporation hose E    |                            |
| (10) Fuel pump gasket                          | (22) Retainer              |                            |
| (11) Fuel pump ASSY                            | (23) Quick connector       |                            |
| (12) Fuel cut valve gasket                     | (24) Jet pump hose A       |                            |
|  | (25) Fuel return hose A    |                            |

---

***Tightening torque: N-m (kg-m, ft-lb)***


***T1: 4.4±1.5 (0.45±0.15, 3.3±1.1)***

***T2: 7.4±2.0 (0.75±0.2, 5.4±1.4)***

***T3: 33±10 (3.4±1.0, 25±7)***

---

B: WITH ORVR MODEL

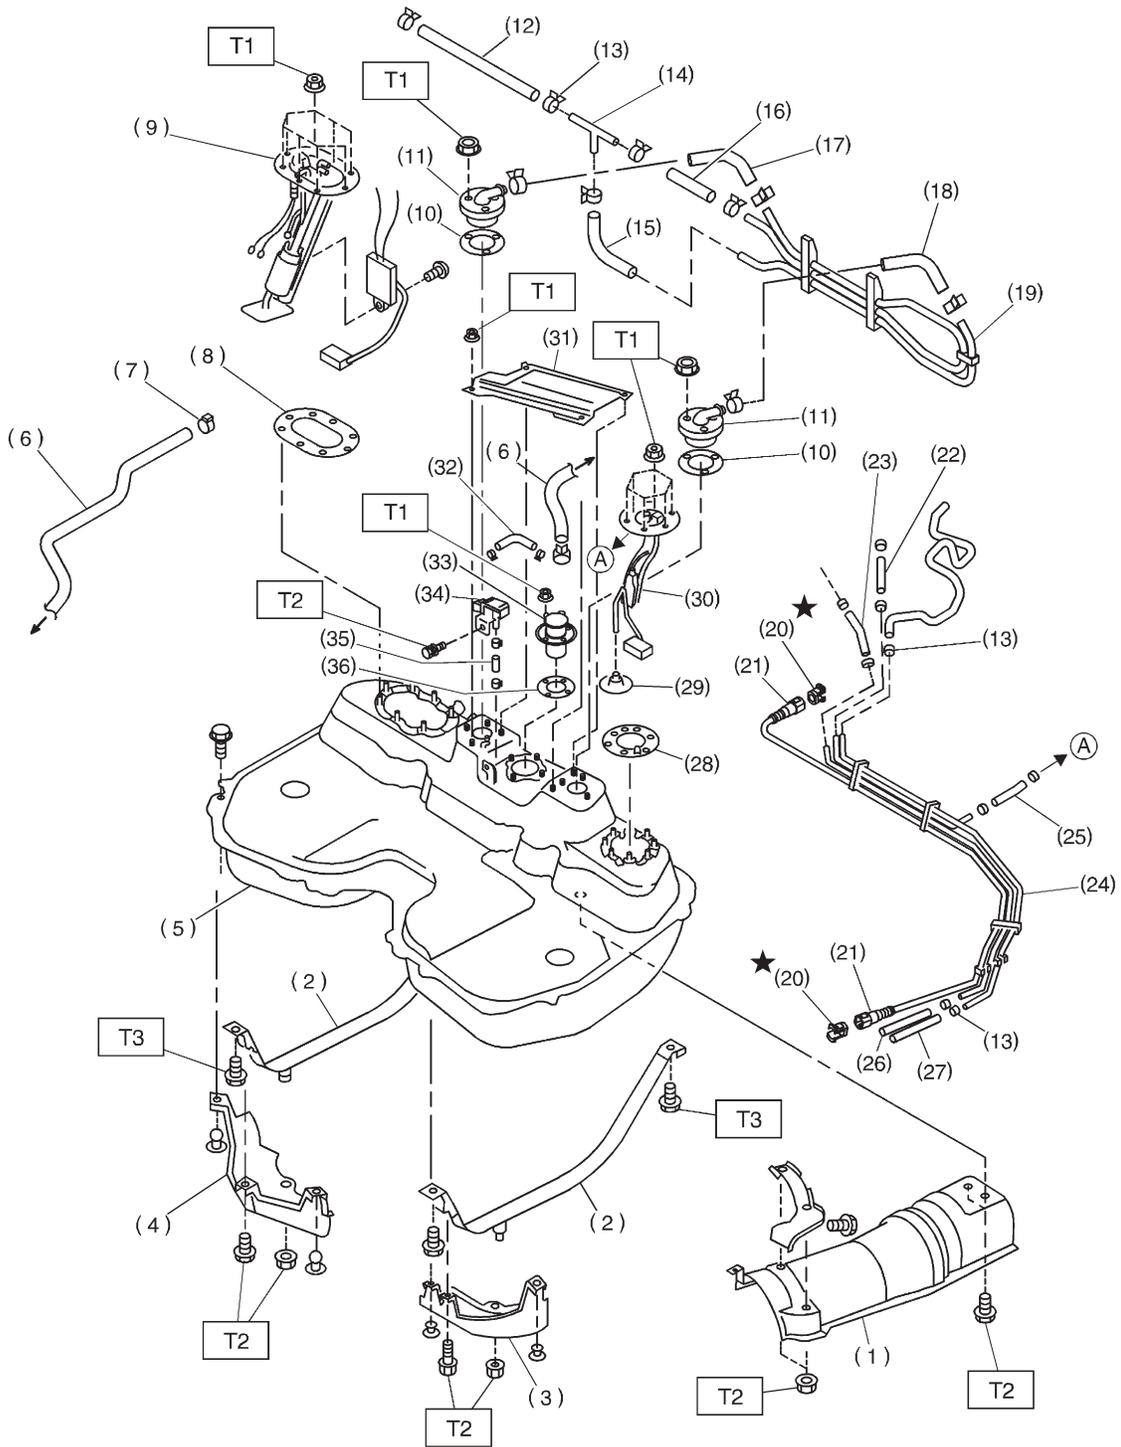

S2M0877A

- 
- |                            |                            |                                     |
|----------------------------|----------------------------|-------------------------------------|
| (1) Heat seated cover      | (15) Evaporation hose C    | (29) Jet pump filter                |
| (2) Fuel tank band         | (16) Evaporation hose B    | (30) Fuel sub meter unit            |
| (3) Protector LH           | (17) Evaporation hose D    | (31) Protector cover                |
| (4) Protector RH           | (18) Evaporation hose E    | (32) Vent valve hose                |
| (5) Fuel tank              | (19) Evaporation pipe ASSY | (33) Vent valve                     |
| (6) Canister hose A        | (20) Retainer              | (34) Fuel tank pressure sensor      |
| (7) Clamp                  | (21) Quick connector       | (35) Fuel tank pressure sensor hose |
| (8) Fuel pump gasket       | (22) Jet pump hose A       | (36) Vent valve gasket              |
| (9) Fuel pump ASSY         | (23) Fuel return hose A    |                                     |
| (10) Fuel cut valve gasket | (24) Fuel pipe ASSY        |                                     |
| (11) Fuel cut valve        | (25) Jet pump hose B       |                                     |
| (12) Fuel delivery hose A  | (26) Fuel return hose B    |                                     |
| (13) Clip                  | (27) Evaporation hose F    |                                     |
| (14) Joint pipe            | (28) Fuel sub meter gasket |                                     |
- 
- Tightening torque: N-m (kg-m, ft-lb)***  
***T1: 4.4±1.5 (0.45±0.15, 3.3±1.1)***  
***T2: 7.4±2.0 (0.75±0.2, 5.4±1.4)***  
***T3: 33±10 (3.4±1.0, 25±7)***
-