


1. Pedal

A: MT MODEL

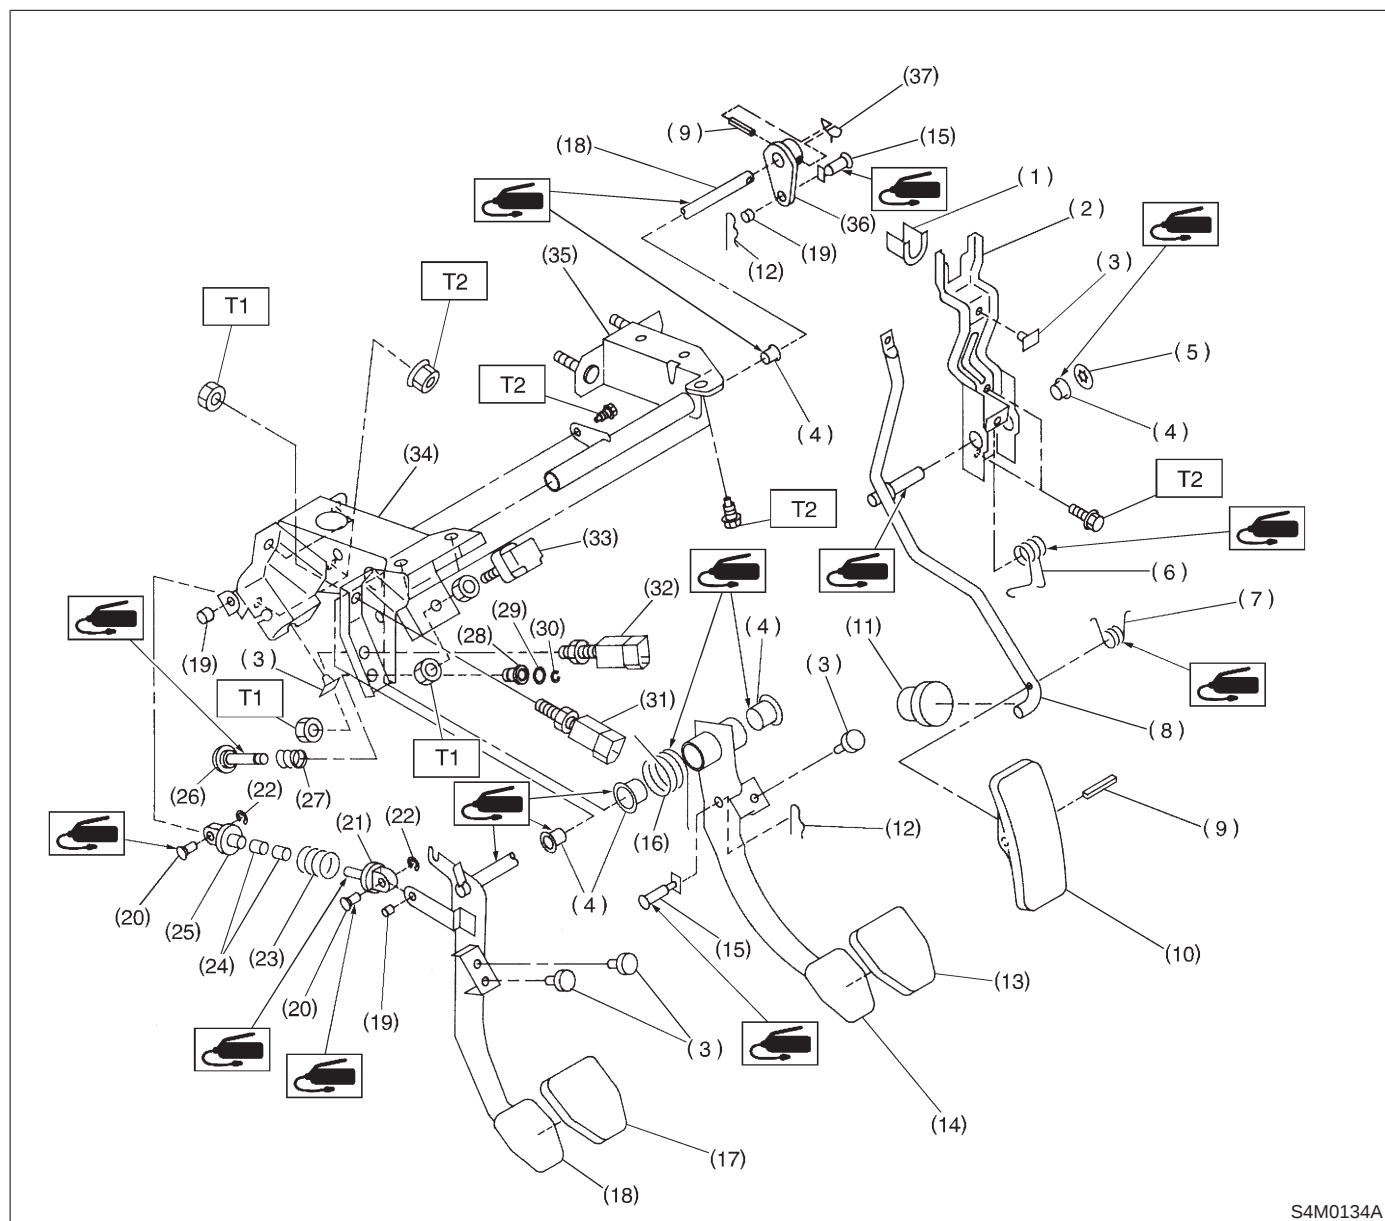

S4M0134A


- | | | |
|------------------------------|-------------------------|--|
| (1) Holder | (16) Brake pedal spring | (31) Clutch switch (Starter interlock) |
| (2) Accelerator bracket | (17) Clutch pedal pad | (32) Clutch switch (With cruise control) |
| (3) Stopper | (18) Clutch pedal | (33) Stop light switch |
| (4) Bushing | (19) Bushing C | (34) Pedal bracket |
| (5) Clip | (20) Clutch clevis pin | (35) Clutch master cylinder bracket |
| (6) Accelerator spring | (21) Assist rod A | (36) Lever |
| (7) Accelerator pedal spring | (22) Clip | (37) Lock wire |
| (8) Accelerator pedal | (23) Assist spring | |
| (9) Spring pin | (24) Assist bushing | |
| (10) Accelerator pedal pad | (25) Assist rod B | |
| (11) Accelerator stopper | (26) Rod S | |
| (12) Snap pin | (27) Spring S | |
| (13) Brake pedal pad | (28) Bushing S | |
| (14) Brake pedal | (29) O-ring | |
| (15) Clevis pin | (30) Clip | |

Tightening torque: N·m (kg·m, ft·lb)

T1: 8±2 (0.8±0.2, 5.8±1.4)

T2: 18±5 (1.8±0.5, 13.0±3.6)

B: AT MODEL

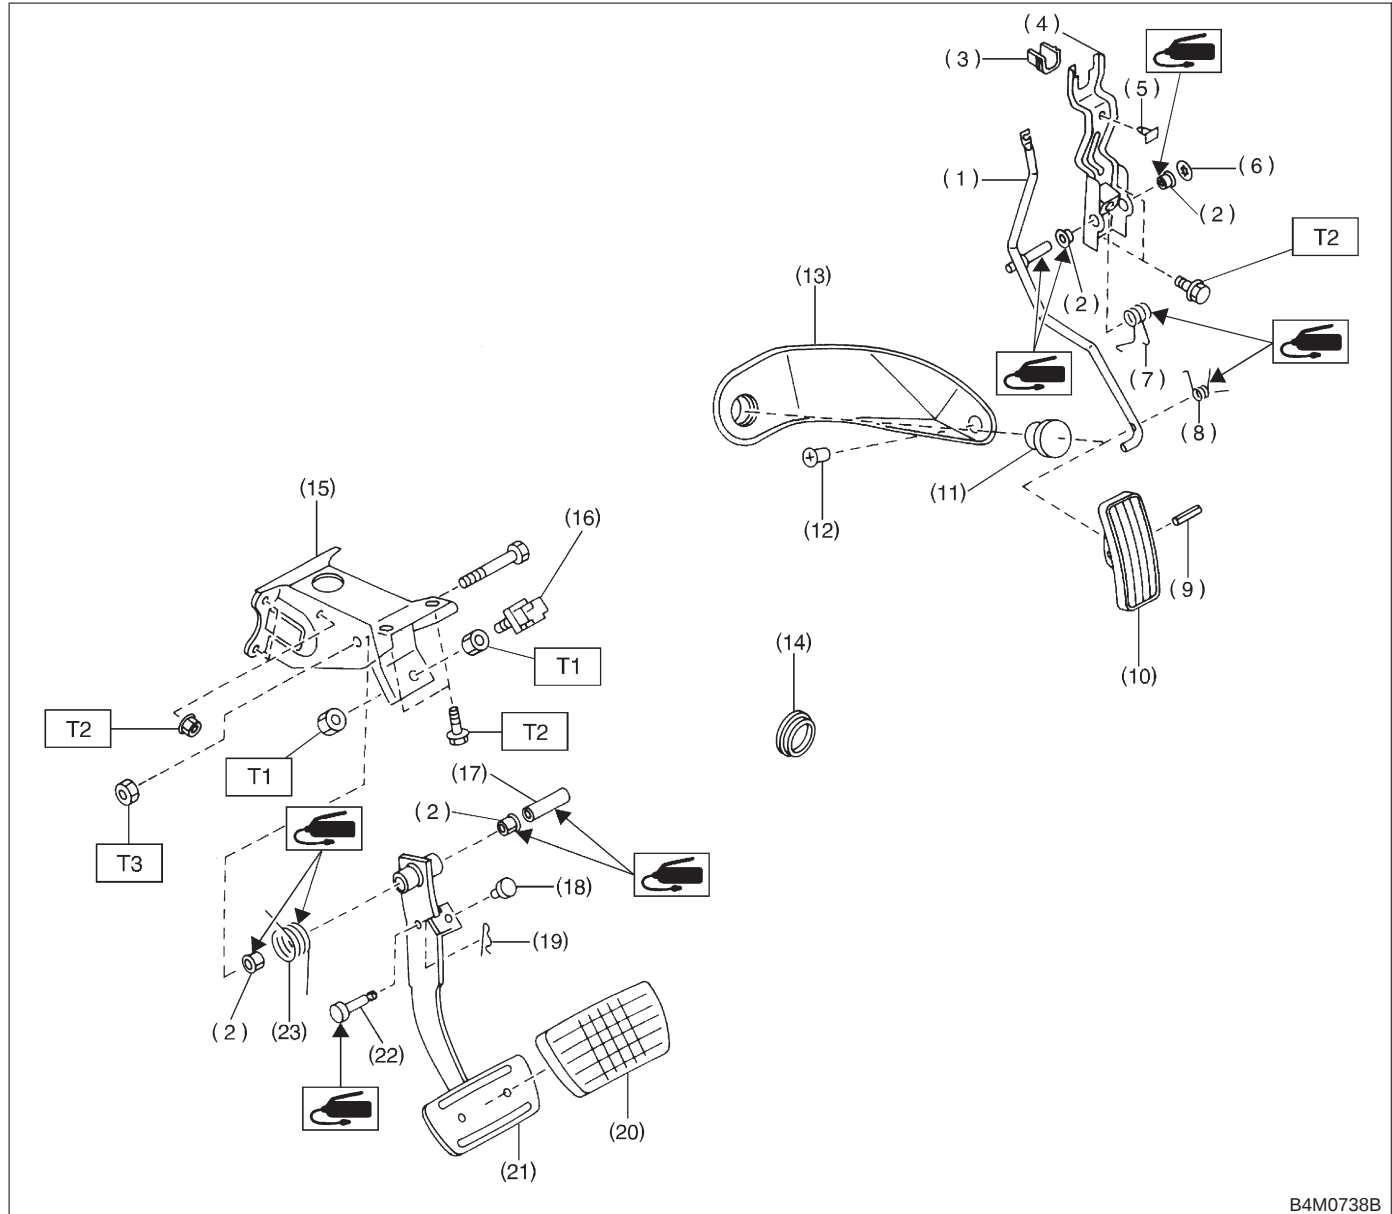

- (1) Accelerator pedal
- (2) Bushing
- (3) Holder
- (4) Accelerator bracket
- (5) Stopper
- (6) Clip
- (7) Accelerator spring
- (8) Accelerator pedal spring
- (9) Spring pin
- (10) Accelerator pedal pad

- (11) Accelerator stopper
- (12) Clip
- (13) Accelerator plate
- (14) Plug
- (15) Pedal bracket
- (16) Stop light switch
- (17) Spacer
- (18) Stopper
- (19) Snap pin
- (20) Brake pedal pad

- (21) Brake pedal
- (22) Clevis pin
- (23) Brake pedal spring

Tightening torque: N·m (kg-m, ft-lb)
T1: 8±2 (0.8±0.2, 5.8±1.4)
T2: 18±5 (1.8±0.5, 13.0±3.6)
T3: 29±7 (3.0±0.7, 21.7±5.1)
