

# BACK-UP LIGHT SYSTEM

Lighting System

## 5. Back-up Light System S914414

### A: SCHEMATIC S914414A21

#### 1. BACK-UP LIGHT S914414A2101

<Ref. to WI-113, SCHEMATIC, Back-up Light System.>

### B: INSPECTION S914414A10


#### 1. BACK-UP LIGHT SWITCH (M/T) S914414A1001

Measure back-up light switch resistance.

Switch position	Terminal No.	Standard
When shift lever is set in reverse position	1 and 2	Less than 1 $\Omega$
Other positions		More than 1 M $\Omega$

#### 2. INHIBITOR SWITCH (A/T) S914414A1002

Measure inhibitor switch resistance.

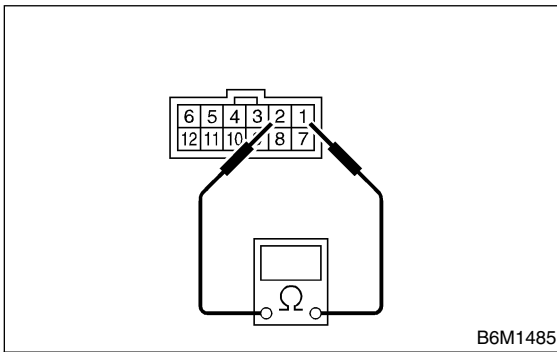

Switch position	Terminal No.	Standard
When select lever is set in "R" position	1 and 2	Less than 1 $\Omega$
Other positions		More than 1 M $\Omega$