

## FRONT FOG LIGHT SYSTEM

LIGHTING SYSTEM

### 3. Front Fog Light System

#### A: SCHEMATIC

##### 1. FRONT FOG LIGHT 4 CYLINDER ENGINE MODEL

<Ref. to WI-152, 4-CYLINDER ENGINE MODEL, SCHEMATIC, Front Fog Light System.>


##### 2. FRONT FOG LIGHT 6 CYLINDER ENGINE MODEL

<Ref. to WI-153, 6-CYLINDER ENGINE MODEL, SCHEMATIC, Front Fog Light System.>

#### B: INSPECTION

##### 1. FRONT FOG LIGHT SWITCH


Measure front fog light switch resistance.

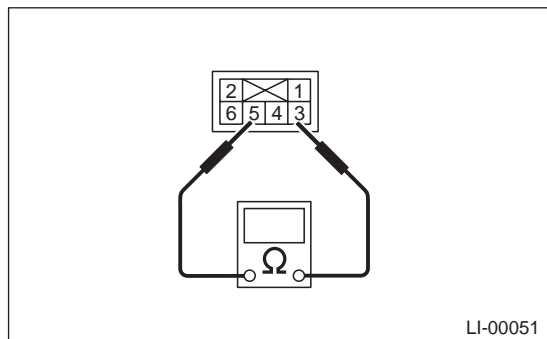

Switch position	Terminal No.	Standard
OFF	—	More than 1 M $\Omega$
ON	3 and 5	Less than 1 $\Omega$

##### 2. FRONT FOG LIGHT RELAY

Measure front fog light relay resistance between terminals while connecting terminal No. 4 to battery positive terminal and terminal No. 3 to battery ground terminal.

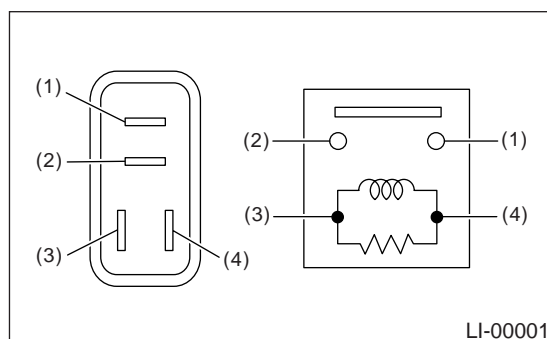

Current	Terminal No.	Standard
Flow	1 and 2	Less than 1 $\Omega$
No flow		More than 1 M $\Omega$

LI-5