


1. Front Suspension

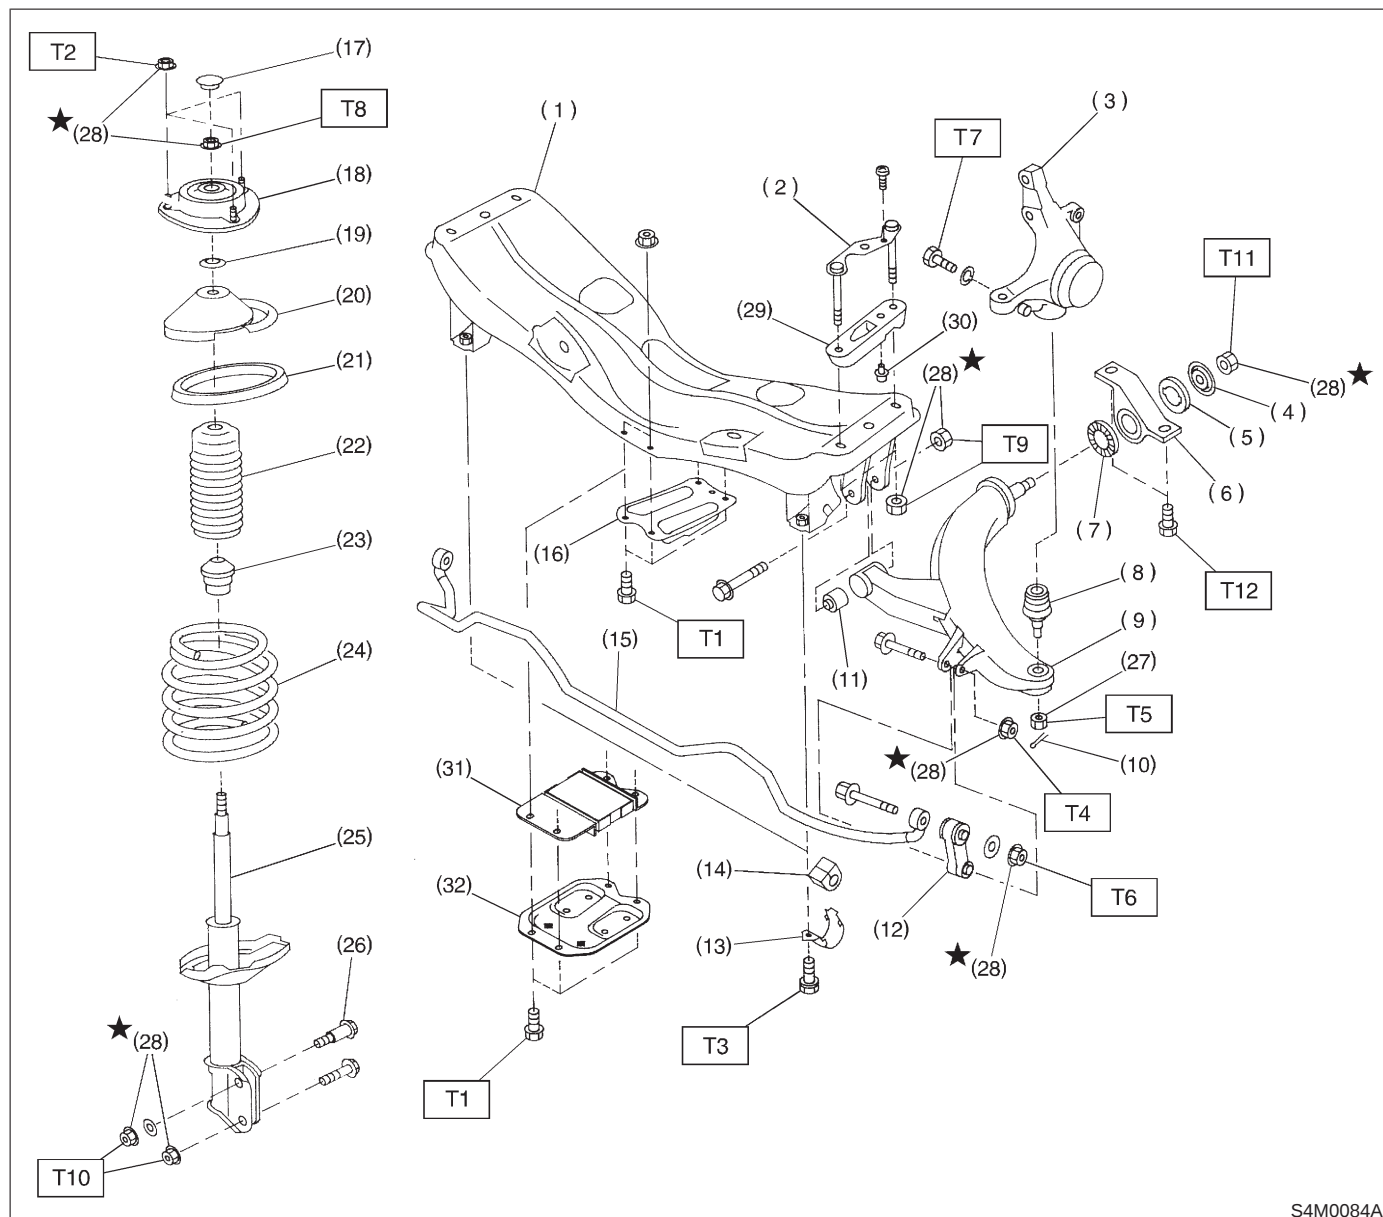

S4M0084A

- | | |
|--------------------------------------|--------------------------------|
| (1) Front crossmember | (17) Dust seal |
| (2) Bolt ASSY | (18) Strut mount |
| (3) Housing | (19) Spacer |
| (4) Washer | (20) Upper spring seat |
| (5) Stopper rubber (Rear) | (21) Rubber seat |
| (6) Rear bushing | (22) Dust cover |
| (7) Stopper rubber (Front) | (23) Helper |
| (8) Ball joint | (24) Coil spring |
| (9) Transverse link | (25) Damper strut |
| (10) Cotter pin | (26) Adjusting bolt |
| (11) Front bushing | (27) Castle nut |
| (12) Stabilizer link | (28) Self-locking nut |
| (13) Clamp | (29) Adapter front crossmember |
| (14) Bushing | (30) Clip |
| (15) Stabilizer | (31) Dynamic damper (MT model) |
| (16) Jack-up plate (Except MT model) | (32) Jack-up plate (MT model) |

Tightening torque: N·m (kg·m, ft·lb)

- | | |
|-------------|----------------------------------|
| T1: | 18±5 (1.8±0.5, 13.0±3.6) |
| T2: | 20±6 (2.0±0.6, 14.5±4.3) |
| T3: | 25±4 (2.5±0.4, 18.1±2.9) |
| T4: | 29±5 (3.0±0.5, 21.7±3.6) |
| T5: | 39 (4, 29) |
| T6: | 44±6 (4.5±0.6, 32.5±4.3) |
| T7: | 49±10 (5.0±1.0, 36±7) |
| T8: | 54±5 (5.5±0.5, 39.8±3.6) |
| T9: | 98±15 (10.0±1.5, 72±11) |
| T10: | 152±20 (15.5±2.0, 112±14) |
| T11: | 186±10 (19.0±1.0, 137±7) |
| T12: | 245±49 (25.0±5.0, 181±36) |