

## BACK-UP LIGHT SYSTEM

LIGHTING SYSTEM

### 5. Back-up Light System

#### A: SCHEMATIC


##### 1. BACK-UP LIGHT

<Ref. to WI-142, SCHEMATIC, Back-up Light System.>

#### B: INSPECTION

##### 1. BACK-UP LIGHT SWITCH (M/T)


Measure back-up light switch resistance.

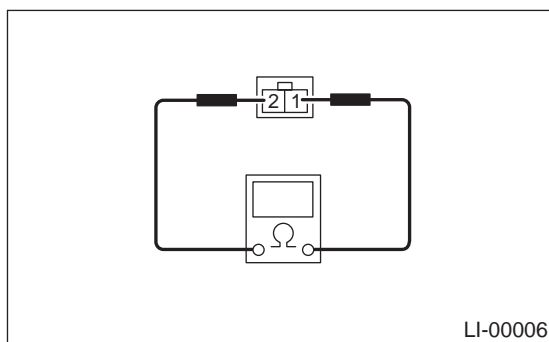

Switch position	Terminal No.	Standard
When shift lever is set in reverse position	1 and 2	Less than 1 $\Omega$
Other positions		More than 1 M $\Omega$

##### 2. INHIBITOR SWITCH (A/T)

Measure inhibitor switch resistance.

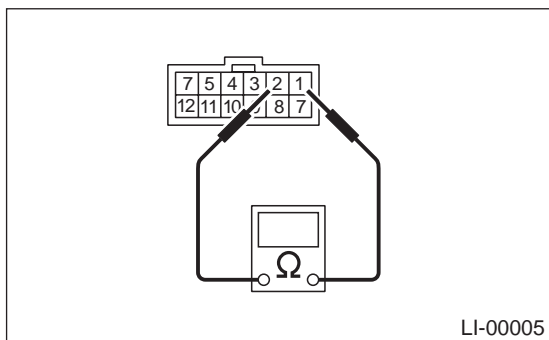

Switch position	Terminal No.	Standard
When select lever is set in "R" position	1 and 2	Less than 1 $\Omega$
Other positions		More than 1 M $\Omega$

LI-7