

INTERIOR LIGHT SYSTEM

LIGHTING SYSTEM

7. Interior Light System

A: SCHEMATIC


1. INTERIOR LIGHT

<Ref. to WI-158, SCHEMATIC, In Compartment Light System.>

B: INSPECTION

1. DOOR SWITCH

Measure door switch resistance.

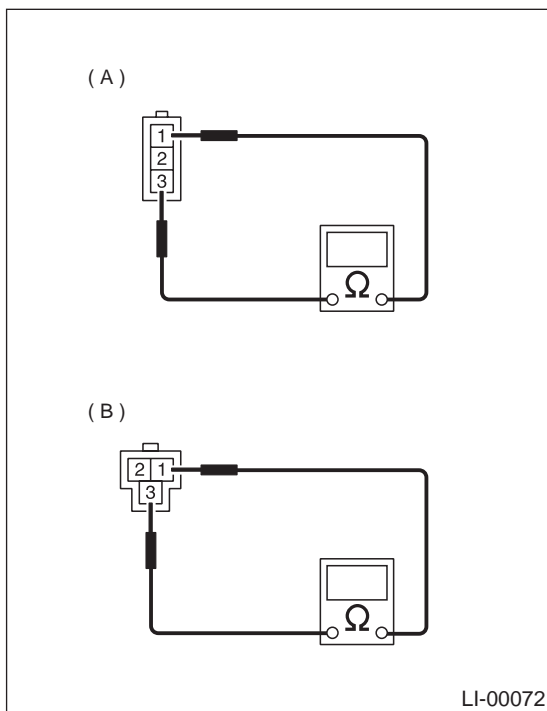

(A) Front door switch
(B) Rear door switch

Switch position	Terminal No.	Standard
When door is open	1 and 3	Less than 1 Ω
When door is closed		More than 1 MΩ

2. REAR GATE LATCH SWITCH

Measure rear gate latch switch.

Switch position	Terminal No.	Standard
When rear gate is open	1 and 2	Less than 1 Ω
When rear gate is closed		More than 1 MΩ

3. TRUNK ROOM LIGHT SWITCH

Measure trunk room light switch.

Switch position	Terminal No.	Standard
When trunk lid is open	1 and 2	Less than 1 Ω
When trunk lid is closed		More than 1 MΩ