


3. Rear Differential Mounting System

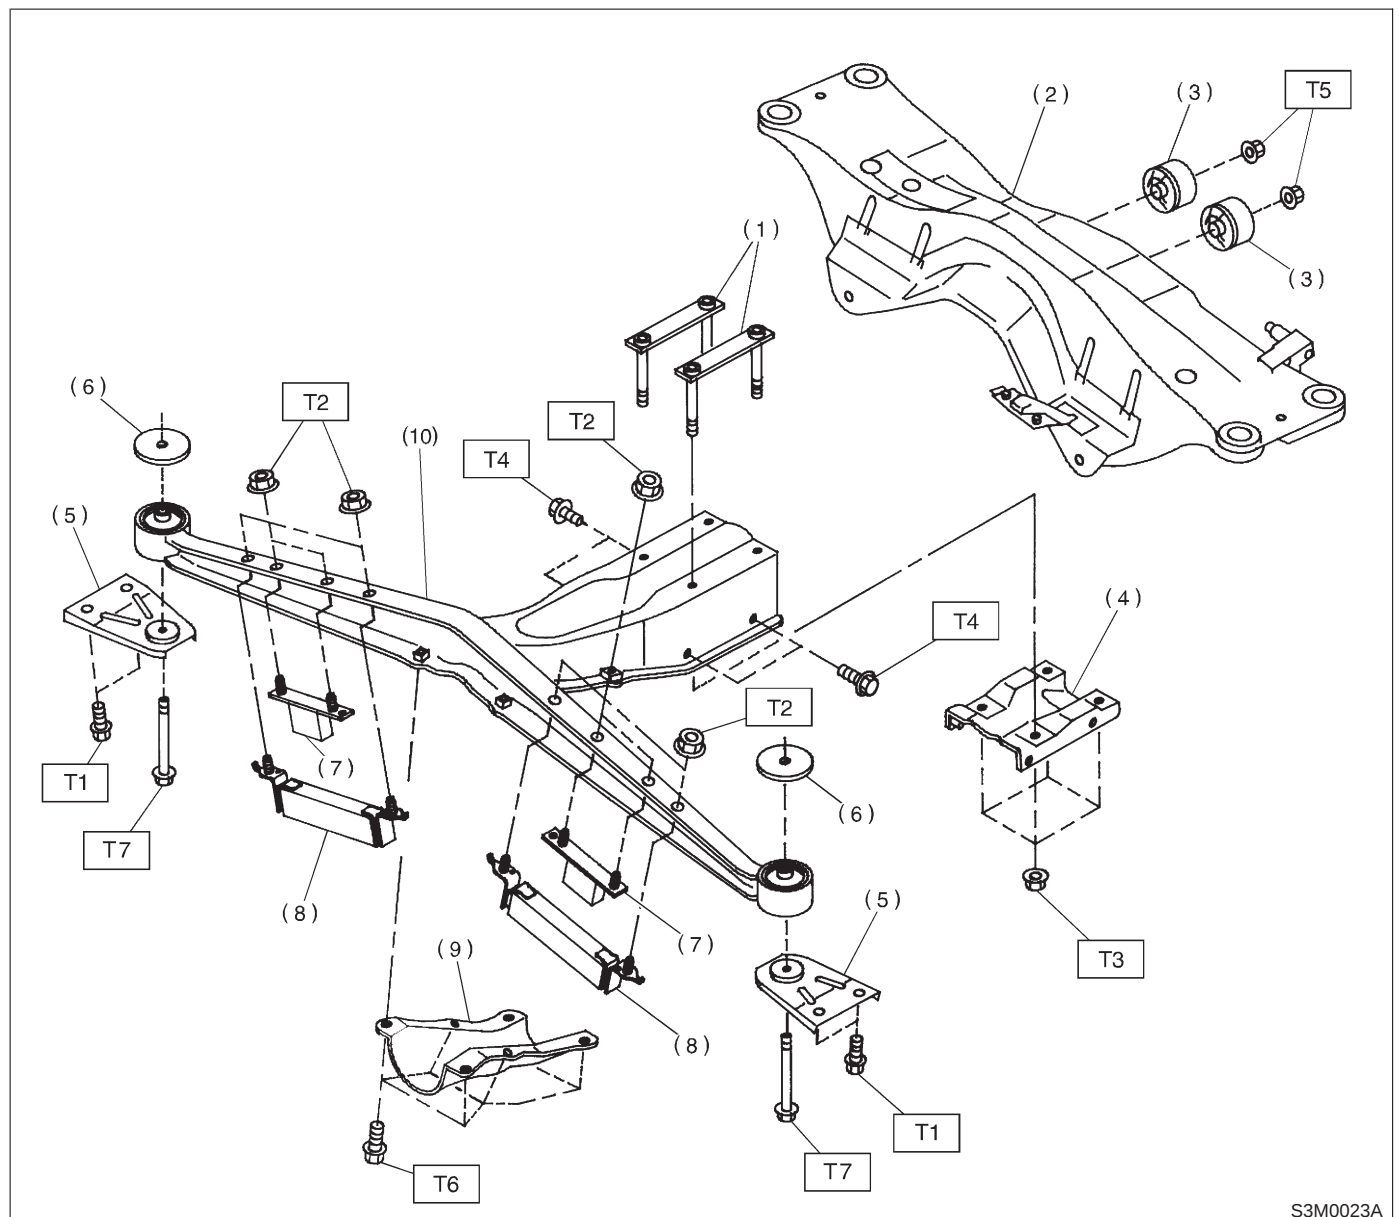

S3M0023A

- (1) Plate
- (2) Crossmember
- (3) Rear bushing
- (4) Differential mount lower bracket
- (5) Differential mount bracket
- (6) Stopper
- (7) Mass damper (AT vehicles)
- (8) Dynamic damper (MT vehicles)
- (9) Differential mount front cover
- (10) Differential front member

Tightening torque: N·m (kg-m, ft-lb)

$T1: 32 \pm 8$ (3.3 ± 0.8 , 23.9 ± 5.8)

T2: 40 ± 10 (4.1 ± 1.0 , 29.7 ± 7.2)

T3: 64 ± 8 (6.5 ± 0.8 , 47.0 ± 5.8)

T4: 69 ± 10 (7.0 ± 1.0 , 51.0 ± 7.2)

T5: 69^{+13}_{-8} ($7.0^{+1.3}_{-0.8}$,
 $50.6^{+9.4}_{-5.8}$)

T6: 88 ± 10 (9.0 ± 1.0 , 65.0 ± 7.2)

T7: 98 ± 10 (10.0 ± 1.0 , 72.0 ± 7.2)