

## 6. Stop Light System

### A: WIRING DIAGRAM


#### 1. STOP LIGHT

<Ref. to WI-121, WIRING DIAGRAM, Stop Light System.>

### B: INSPECTION

#### 1. STOP LIGHT SWITCH

Measure the resistance between stop light switch terminals.

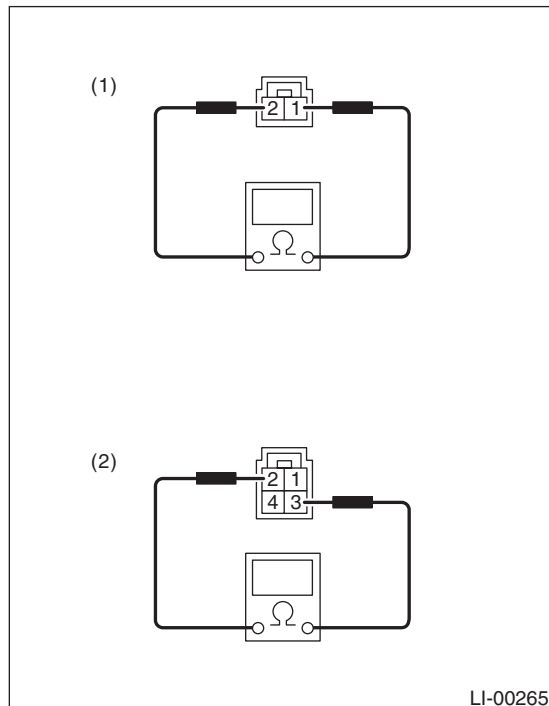

(1) Models without cruise control

(2) Models with cruise control

Switch position	Terminal No.	Standard
When brake pedal is depressed	Models without cruise control: 1 and 2	Less than 1 $\Omega$
When brake pedal is released	Models with cruise control: 2 and 3	1 M $\Omega$ or more