
8. Reduction Gear

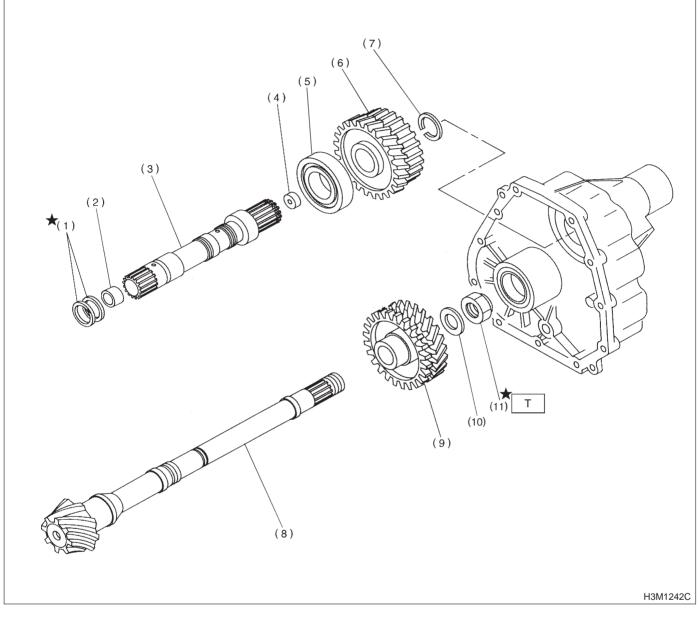

- (1) Seal ring
- (2) Bushing(3) Reduction drive shaft
- (4) Plug
- (4) Plug
- (5) Ball bearing

- (6) Reduction drive gear
- (7) Snap ring
- (8) Drive pinion shaft
- (9) Reduction driven gear
- (10) Washer

(11) Lock nut

Tightening torque: N⋅m (kg-m, ft-lb) T: 98±5 (10.0±0.5, 72.3±3.6)