


9. Differential Case

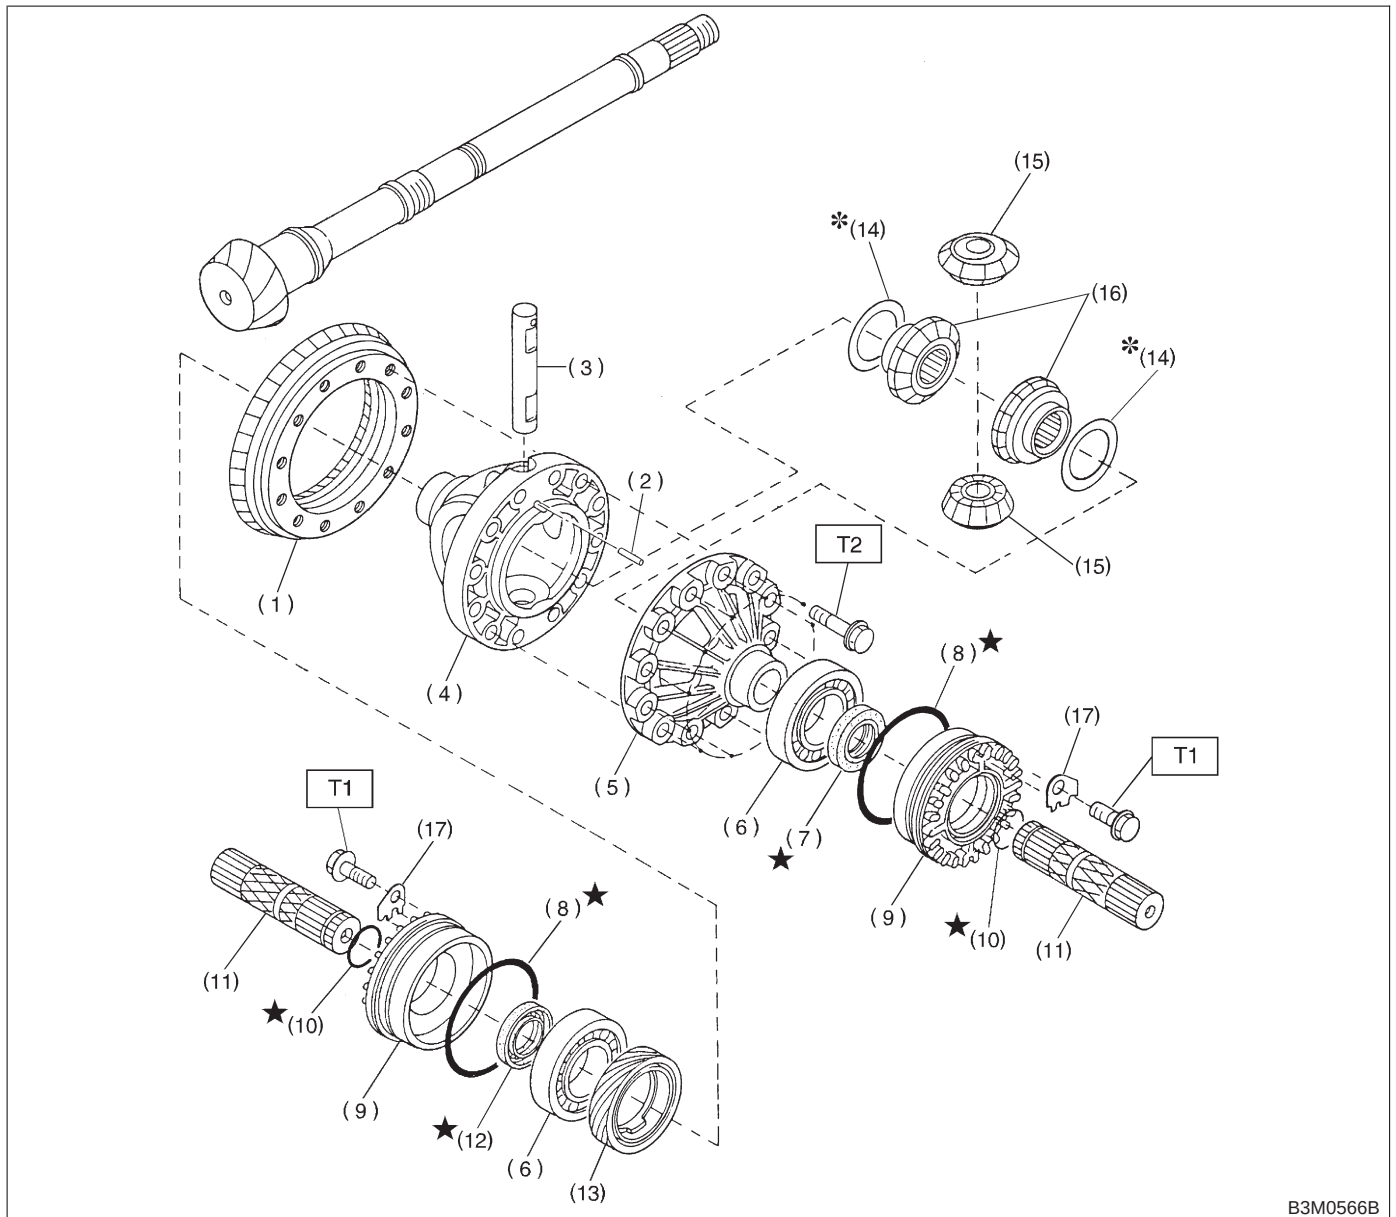

B3M0566B

- (1) Crown gear
- (2) Straight pin
- (3) Pinion shaft
- (4) Differential case (RH)
- (5) Differential case (LH)
- (6) Taper roller bearing
- (7) Oil seal (LH)
- (8) O-ring
- (9) Differential side retainer
- (10) Circlip
- (11) Axle shaft
- (12) Oil seal (RH)
- (13) Speedometer drive gear
- (14) Washer
- (15) Differential bevel pinion
- (16) Differential bevel gear

- (17) Lock plate

Tightening torque: N·m (kg-m, ft-lb)

$T1: 25 \pm 2$ (2.5 ± 0.2 , 18.1 ± 1.4)

T2: 62 ± 5 (6.3 ± 0.5 , 45.6 ± 3.6)