
2. Drive Pinion Assembly

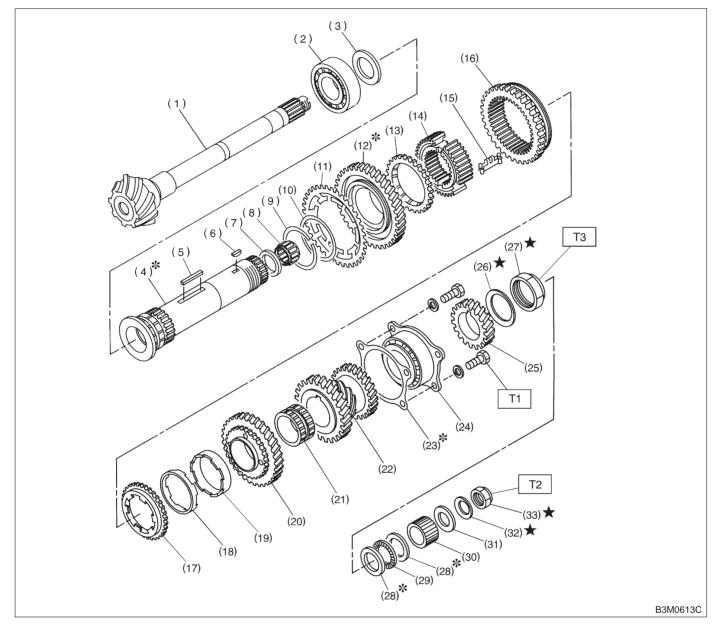

- (1) Drive pinion shaft
- (2) Roller bearing
- (3) Washer
- (4) Driven shaft
- (5) Key
- (6) Woodruff key
- (7) Drive pinion collar
- (8) Needle bearing
- (9) Snap ring (Outer)
- (10) Washer
- (11) Sub gear
- (12) 1st driven gear
- (13) Baulk ring

- (14) 1st-2nd synchronizer hub
- (15) Insert key
- (16) Reverse driven gear
- (17) Outer baulk ring
- (18) Synchro cone
- (19) Inner baulk ring
- (20) 2nd driven gear
- (21) 2nd driven gear bush
- (22) 3rd-4th driven gear
- (23) Driven pinion shim
- (24) Roller bearing
- (25) 5th driven gear
- (26) Lock washer

- (27) Lock nut (28) Washer
- (28) washer
- (29) Thrust bearing
- (30) Differential bevel gear sleeve
- (31) Washer
- (32) Lock washer
- (33) Lock nut

Tightening torque: N⋅m (kg-m, ft-lb) T1: 29±3 (3.0±0.3, 21.7±2.2)

- T2: 118±8 (12.0±0.8, 86.8±5.8)
- *T3: 265*±10 (27±1, 195±7)