


6. Rear Gate Glass

A: REMOVAL

- 1) Remove rear wiper and rear gate trim.
- 2) Disconnect connector from rear defogger terminal.
- 3) Remove glass in the same manner as windshield.


NOTE:

A matching pin is cemented to corners of the glass on the compartment side. Use a piano wire when cutting each pin.

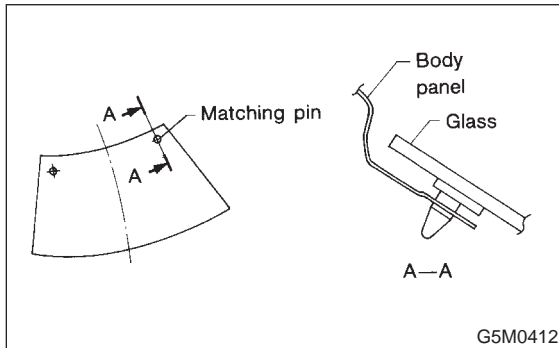


B: INSTALLATION

- 1) Install a new rubber strip (A) by aligning it with the end of the rear gate glass (B).

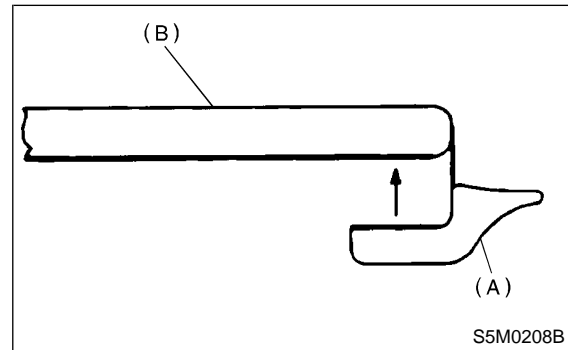

- 2) Install glass in the same manner as windshield.

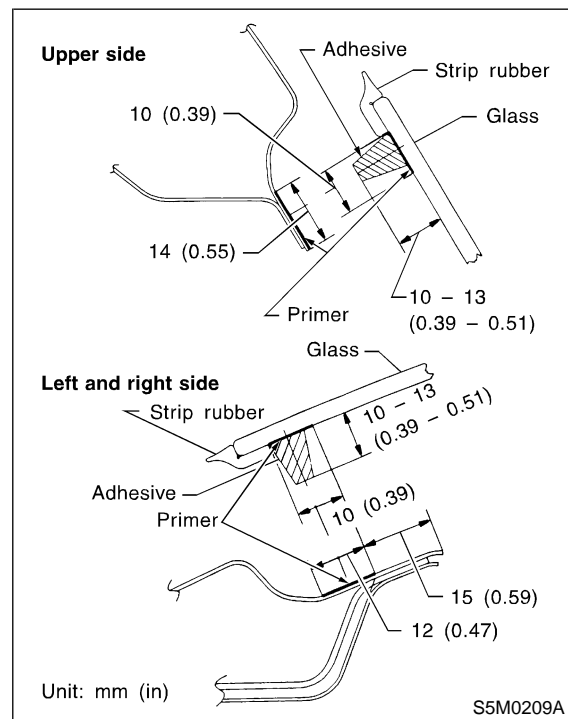

- 3) About one hour after installation, test for water leakage. Leave vehicle for 24 hours before using it.
- 4) Connect rear defogger connections.
- 5) Install rear gate trim and rear wiper.