


1. Tire and Wheel Size

1. Tire and Wheel Size

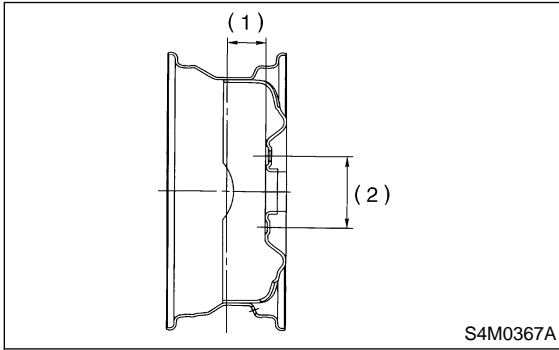

- (1) Offset
- (2) P.C.D.

		Tire size	Rim size	Rim offset	P.C.D.
Front and Rear	L	P205/70R15 95S	15 × 6J	48 mm (1.89 in)	100 mm (3.94 in) dia.
	S	P215/60R16 94H	16 × 6 1/2JJ	48 mm (1.89 in)	

NOTE:
Spare tires are the same for both front and rear.

2. Tire Inflation Pressure

Model	Tire size	Tire inflation pressure	
		Light load	Full load
L	P205/70R15 95S	Ft: 200 kPa (2.0 kg/cm ² , 29 psi)	Ft: 200 kPa (2.0 kg/cm ² , 29 psi)
S	P215/60R16 94H	Rr: 190 kPa (1.9 kg/cm ² , 27 psi)	Rr: 250 kPa (2.5 kg/cm ² , 36 psi)

NOTE:
At trailer towing, rear inflation pressure is 280 kPa (2.8 kg/cm², 41 psi).