


# INSTRUMENT PANEL CENTER COMPARTMENT

EXTERIOR/INTERIOR TRIM

## 24. Instrument Panel Center Compartment

### A: REMOVAL

- 1) Disconnect the ground cable from battery.
- 2) Insert a flat tip screwdriver, and then pry up to remove the clips.

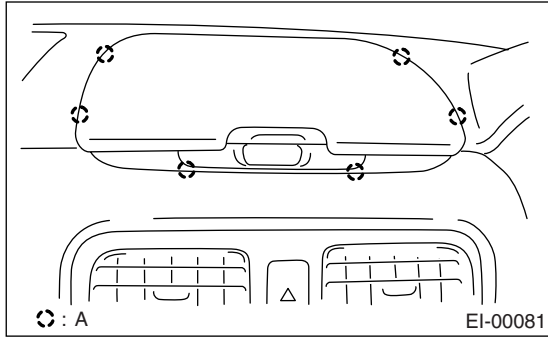

(A) Clip

- 3) Remove the instrument panel center compartment from instrument panel.
- 4) Disconnect the connector from clock.

### B: INSTALLATION

Install in the reverse order of removal.