


## 5. Tweeter

### A: REMOVAL

- 1) Disconnect the ground cable from battery.
- 2) Remove the gusset cover.
- 3) Remove the tweeter mounting clips.

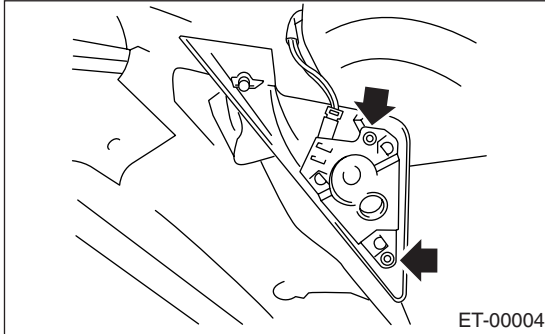

- 4) Disconnect the harness connector and remove tweeter.

### B: INSTALLATION

Install in the reverse order of removal.