


7. Outer Mirror

A: REPLACEMENT

- 1) Remove the door mirror assembly. <Ref. to GW-11, REMOVAL, Outer Mirror Assembly.>
- 2) Warm the area around the mirror holder (1) with a hair drier until the edges of the mirror holder become soft (about 2 or 3 minutes with a 1,000 W drier.)
- 3) Use a flat tip screwdriver without sharp edges to lift the mirror out of the mirror holder. (Also disconnect the mirror heater connector from the back of mirror.)

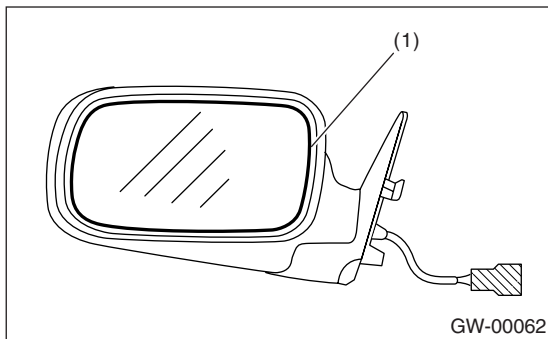

- 4) When installing the mirror, warm the area around the mirror holder with a hair drier until the edges of the mirror holder become soft again (about 2 or 3 minutes with a 1,000 W drier.)
- 5) Remove the backing of the new double-stick tape, and push the mirror in to install it.

NOTE:

Unless the mirror holder is warmed sufficiently, the mirror holder edges may be damaged or the mirror cracked.