


3. Power Window Control Switch


A: REMOVAL

1. MAIN SWITCH

- 1) Disconnect the ground cable from battery.
- 2) Using a flat tip screwdriver, remove the screw cover.

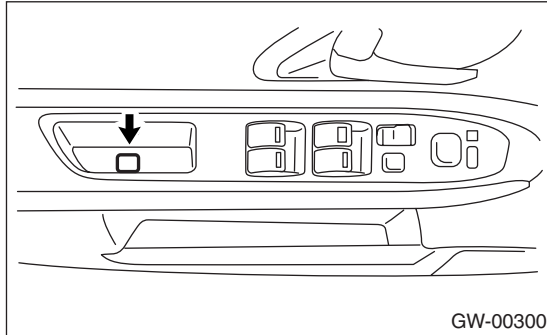


- 3) Loosen the screw to remove the power window main switch.

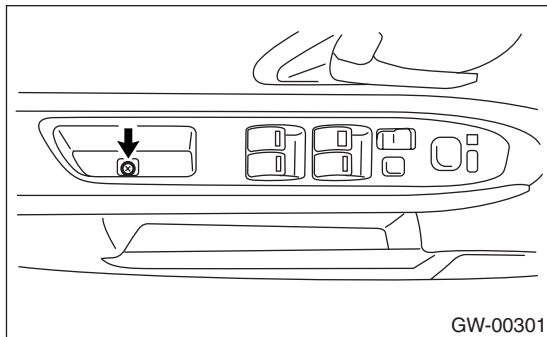


- 4) Disconnect the connector.

2. SUB-SWITCH

- 1) Disconnect the ground cable from battery.
- 2) Remove the screw which secures switch panel.

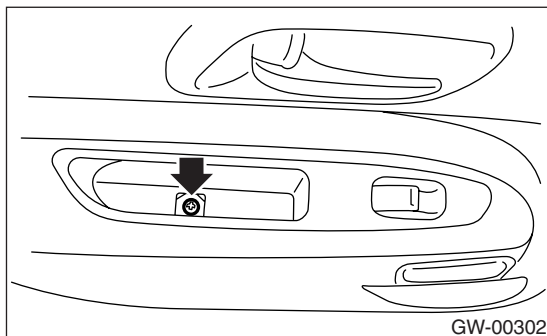

- 3) Remove the switch panel.

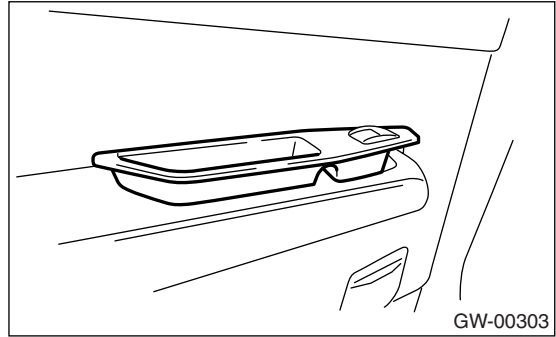

- 4) Disconnect the connector.

B: INSTALLATION

1. MAIN SWITCH

Install in the reverse order of removal.

2. SUB-SWITCH

Install in the reverse order of removal.