


12. Front Accessory Power Supply Socket

A: REMOVAL

- 1) Disconnect the ground cable from the battery.
- 2) Remove the front cover. <Ref. to EI-38, REMOVAL, Console Box.>
- 3) Disconnect the harness connectors and remove the front accessory power supply socket.

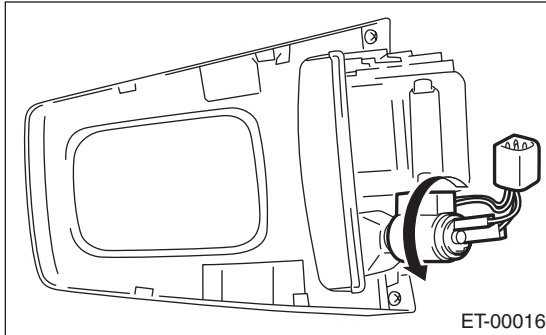

B: INSTALLATION

Install in the reverse order of removal.