


## 14.AUX Input Terminal

### A: REMOVAL

- 1) Disconnect the ground cable from the battery.
- 2) Remove the console front cover. <Ref. to EI-38, REMOVAL, Console Box.>
- 3) Remove the tab (A), and remove AUX input terminal.

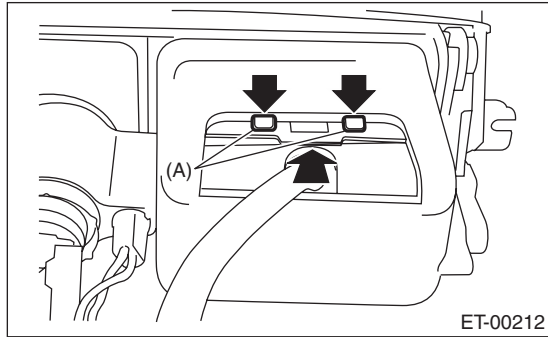

### B: INSTALLATION

Install in the reverse order of removal.

# AUX Input Terminal

ENTERTAINMENT

---