

# Instrument Panel Center Compartment


EXTERIOR/INTERIOR TRIM

---

## 25. Instrument Panel Center Compartment

### A: REMOVAL

- 1) Disconnect the ground cable from the battery.
- 2) Use a flat tip screwdriver to pry off the clip.

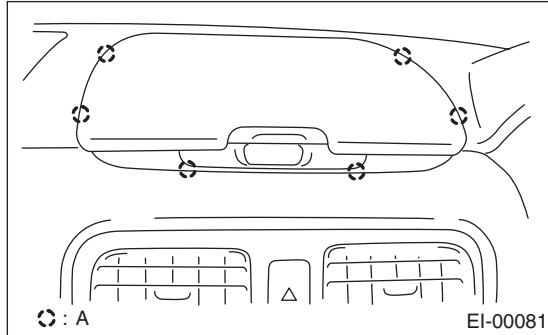

(A) Clip

- 3) Remove the instrument panel center compartment from the instrument panel.
- 4) Disconnect the clock connector.

### B: INSTALLATION

Install in the reverse order of removal.