

# General Description

## PARKING BRAKE


### 1. General Description

#### A: SPECIFICATION

Model		Rear drum brake	Rear disc brake
Type		Rear brake mechanical	Mechanical, drum in disc rear brakes
Effective drum diameter	mm (in)	228.6 (9)	170 (6.69)
Lining dimensions (Length x Width x Thickness)	mm (in)	219.4 x 35.0 x 4.1 (8.64 x 1.378 x 0.161)	163.1 x 30.0 x 3.2 (6.42 x 1.181 x 0.126)
Clearance adjustment		Automatic adjusting	Manual adjustment
Lever stroke	notches/N (kgf, lb)	7 — 8/196 (20, 44)	

#### B: COMPONENT

##### 1. PARKING BRAKE (REAR DISC BRAKE)

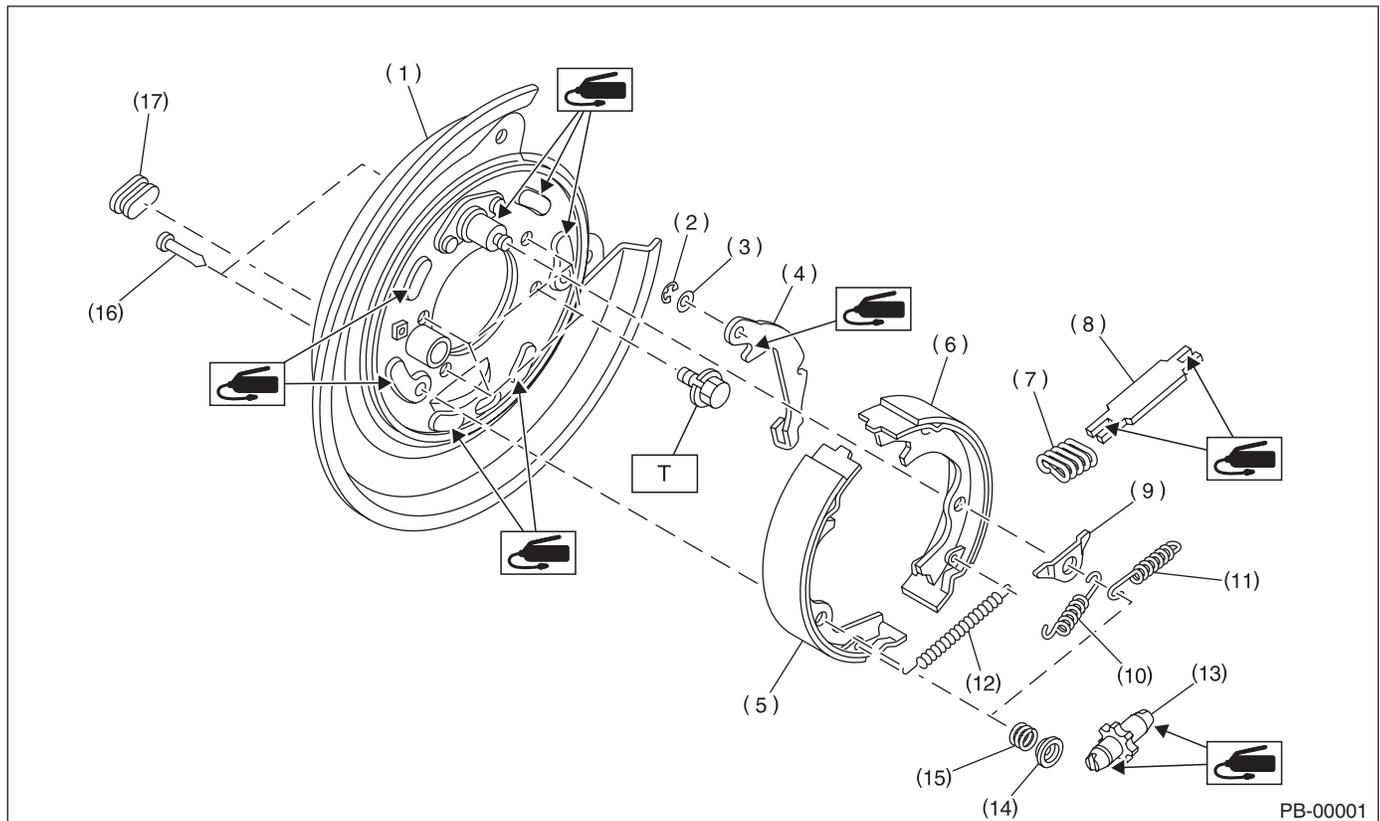


PB-00001

- |                                    |                              |                            |
|------------------------------------|------------------------------|----------------------------|
| (1) Back plate                     | (8) Strut                    | (15) Shoe hold-down spring |
| (2) Retainer                       | (9) Shoe guide plate         | (16) Shoe hold-down pin    |
| (3) Spring washer                  | (10) Primary return spring   | (17) Adjusting hole cover  |
| (4) Lever                          | (11) Secondary return spring |                            |
| (5) Parking brake shoe (Primary)   | (12) Adjusting spring        |                            |
| (6) Parking brake shoe (Secondary) | (13) Adjuster                |                            |
| (7) Strut spring                   | (14) Shoe hold-down cup      |                            |

**Tightening torque: N-m (kgf-m, ft-lb)**

**T: 53 (5.4, 39.1)**

## 2. PARKING BRAKE CABLE

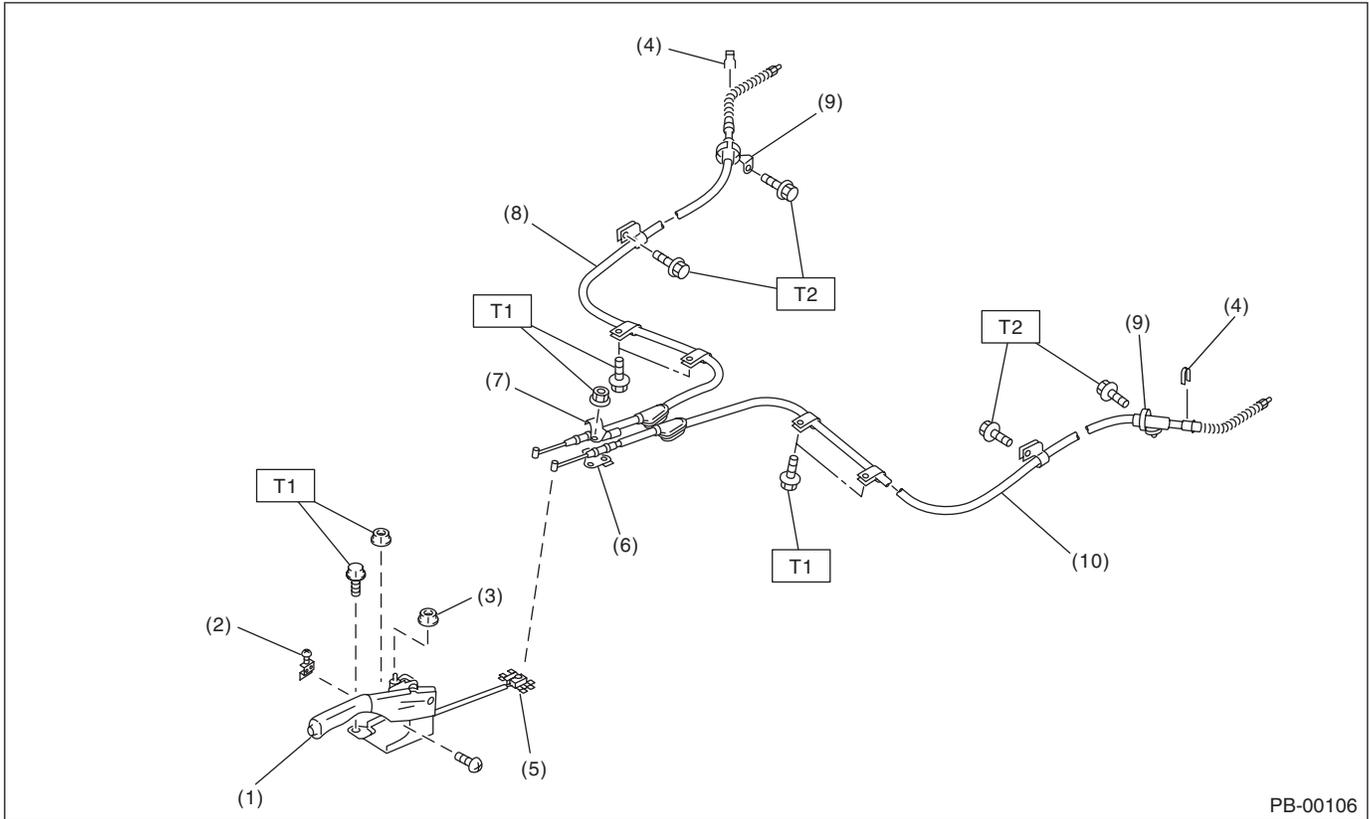

PB-00106

- |  |                            |                             |
|--|----------------------------|-----------------------------|
| (1) Parking brake lever                | (5) Equalizer              | (10) Parking brake cable LH |
| (2) Parking brake switch               | (6) Bracket                |                             |
| (3) Self-locking nut                   | (7) Clamp                  |                             |
| (4) Clamp (Rear disc brake model only) | (8) Parking brake cable RH |                             |
|  | (9) Cable guide            |                             |

**Tightening torque: N·m (kgf·m, ft·lb)**

**T1: 18 (1.8, 13.0)**

**T2: 32 (3.3, 23.6)**

## General Description

### PARKING BRAKE

---

#### **C: CAUTION**

- Wear appropriate work clothing, including a cap, protective goggles and protective shoes when performing any work.
- Before removal, installation or disassembly, be sure to clarify the failure. Avoid unnecessary removal, installation, disassembly and replacement.
- Vehicle components are extremely hot after driving. Be wary of receiving burns from heated parts.
- Use SUBARU genuine grease etc. or equivalent. Do not mix grease etc. of different grades or manufacturers.
- Be sure to tighten fasteners including bolts and nuts to the specified torque.
- Place shop jacks or rigid racks at the specified points.
- Before securing a part in a vise, place cushioning material such as wood blocks, aluminum plate or cloth between the part and the vise.
- Make sure grease does not come into contact with the parking shoes.