


1. Seat

3. WALK-IN SYSTEM

When getting in or out of rear seat, front passenger seat can be moved to the forward most position as follows:

Depress pedal ① or lift reclining hinge lever ② to tilt backrest forward. Reclining hinge will then release slide rail lock so that seat moves forward.

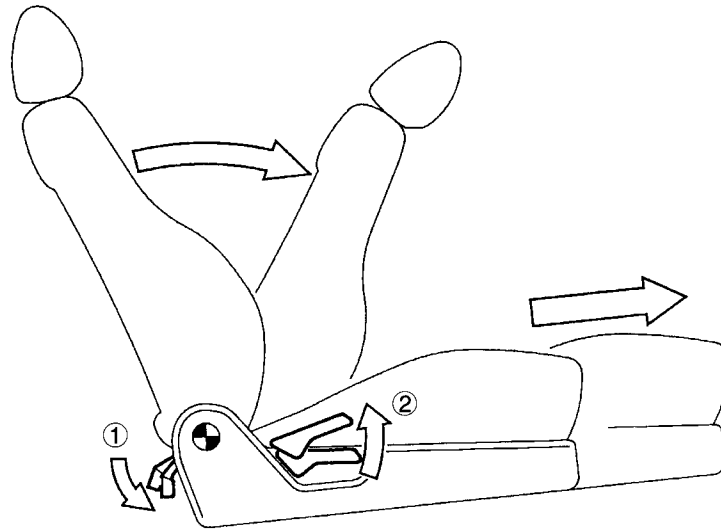


G5H0625

2. Seat Belt

3. SEAT BELT GUIDE

A seat belt guide can be used to easily pull the webbing out by forward rotate arm when fastening the seat belt.

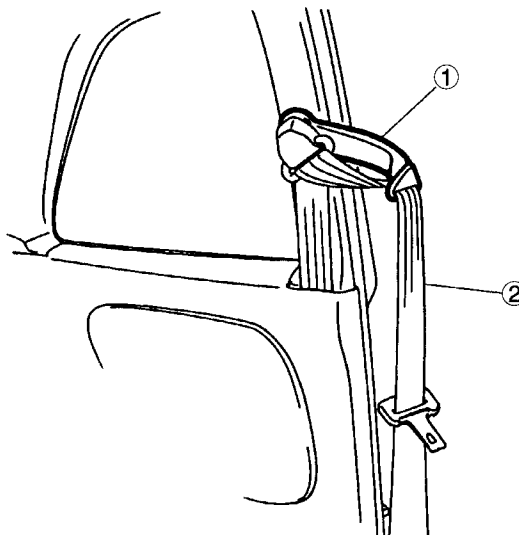

G5H0626A

- ① Arm
- ② Webbing