


6. Rear Bumper


A: REMOVAL

1. SEDAN AND COUPE

- 1) Open trunk lid. Remove trunk trim panel clips and detach trim.
- 2) Disconnect license plate light connector.
- 3) Remove bolts from side of bumper.

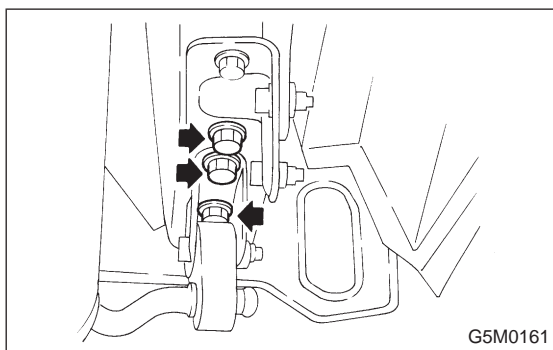


- 4) Remove bolts from bumper stay.

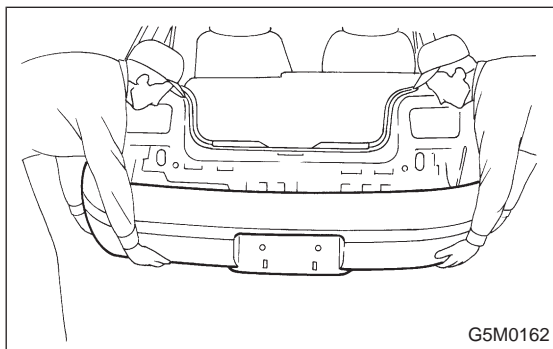

- 5) Remove rear bumper.

2. WAGON

- 1) Open rear gate and rear quarter trim lid.
- 2) Disconnect license plate light connector.
- 3) Remove bolts from side of bumper.
- 4) Remove bolts from bumper stays.
- 5) Remove bumper assembly.

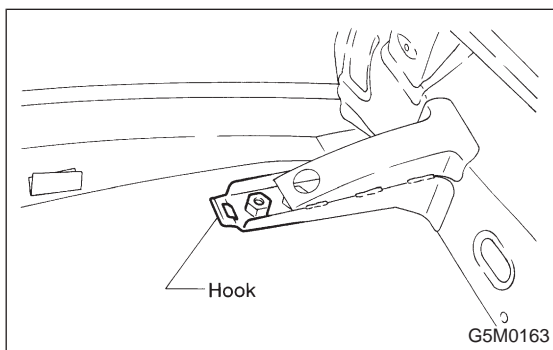

B: INSTALLATION

To install the rear bumper, reverse the above removal procedures.

CAUTION:

- Be extremely careful to prevent scratches on bumper face as it is made of resin.
- Be careful not to scratch the body when removing or installing bumper.
- To facilitate installation of rear bumper, attach hook (located at stay) to body panel.