


5. Control Valve and Harness Routing

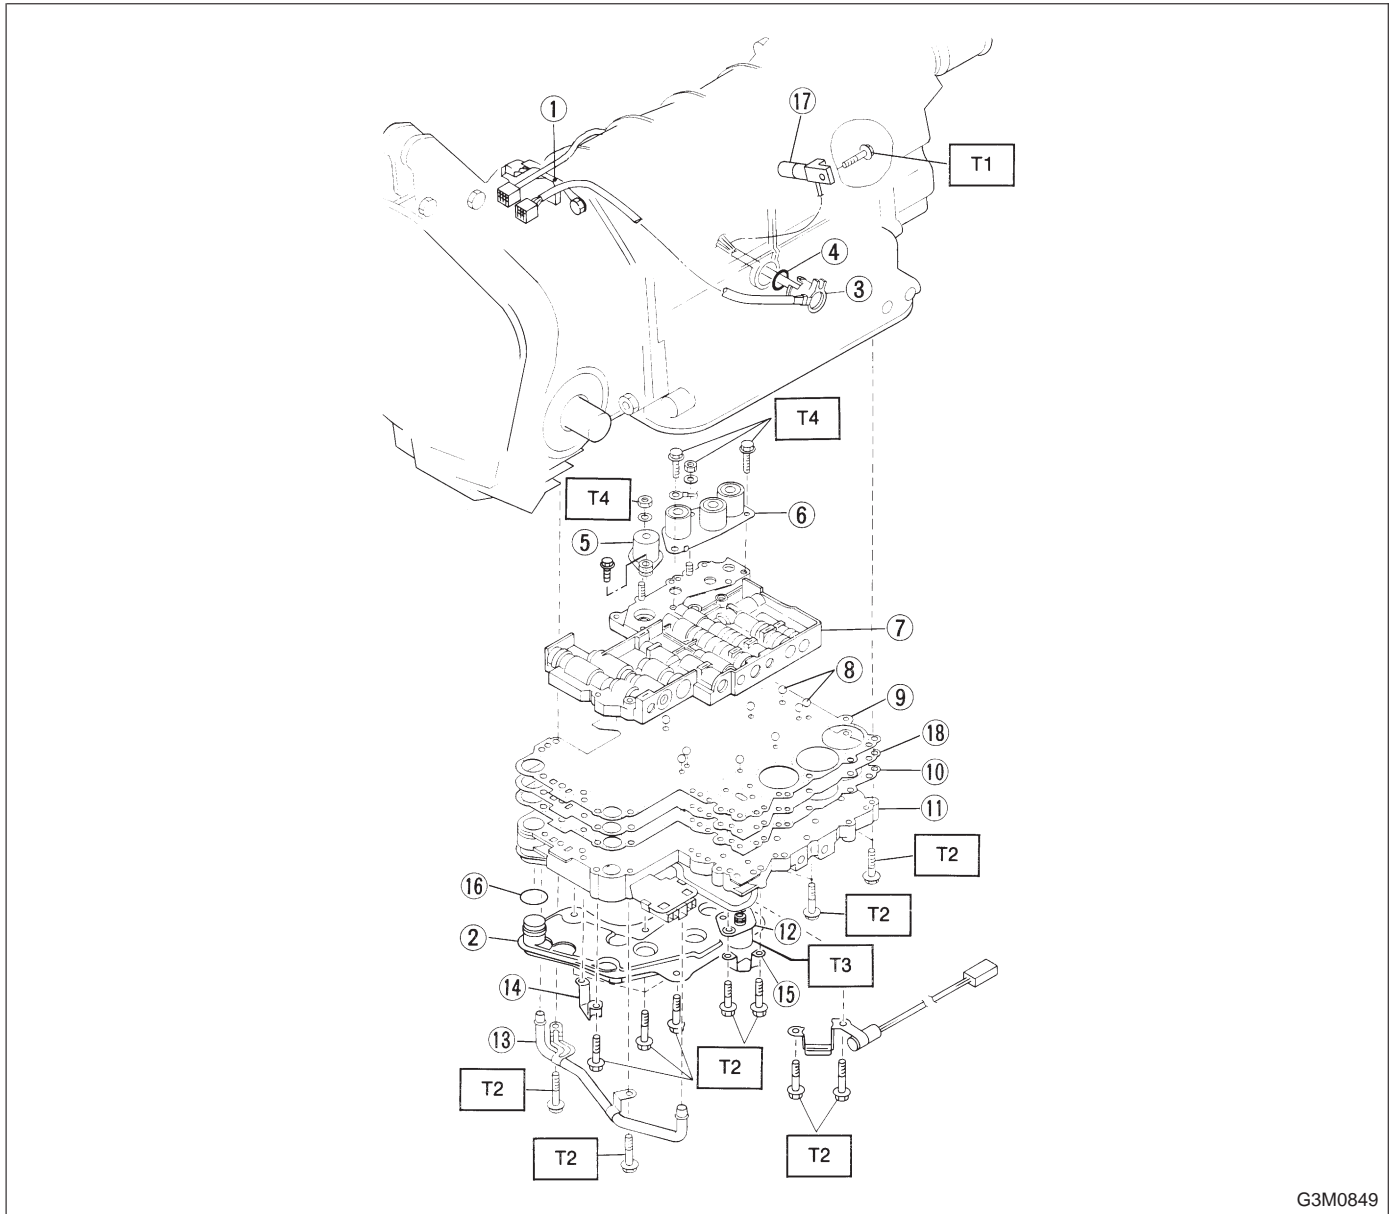

G3M0849

- ① Stay
- ② Oil strainer
- ③ Transmission harness
- ④ O-ring
- ⑤ Duty sol. A (Line pressure)
- ⑥ Sol. ASSY
- ⑦ Upper valve body
- ⑧ Ball
- ⑨ Upper separator gasket
- ⑩ Lower separator gasket
- ⑪ Lower valve body
- ⑫ Duty sol. B (Lock-up)
- ⑬ Pipe

- ⑭ Bracket
- ⑮ Bracket
- ⑯ O-ring
- ⑰ Vehicle speed sensor 1 (FWD only)
- ⑱ Separator plate

Tightening torque: N·m (kg·m, ft·lb)

T1: 7±1 (0.7±0.1, 5.1±0.7)

T2: 8±1 (0.8±0.1, 5.8±0.7)

T3: 11.3±1.5 (1.15±0.15, 8.3±1.1)

T4: 8.3±1.5 (0.85±0.15, 6.1±1.1)