


2. Rear Suspension

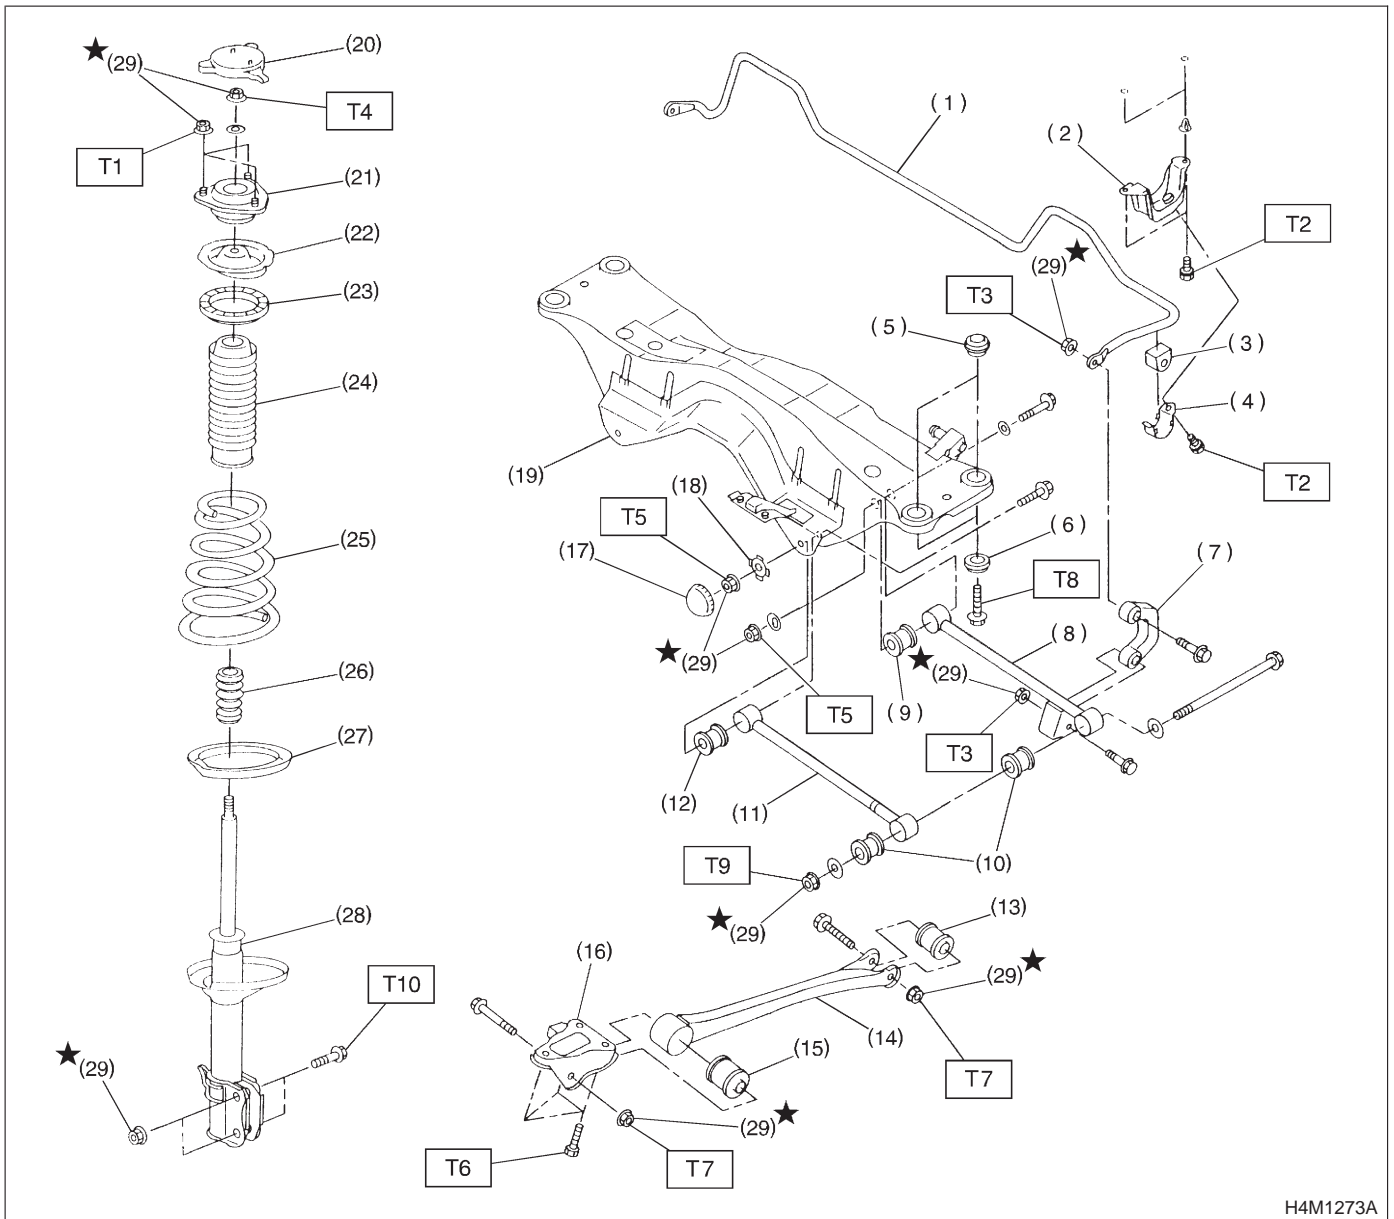

H4M1273A

- | | |
|----------------------------------|----------------------------|
| (1) Stabilizer | (16) Trailing link bracket |
| (2) Stabilizer bracket | (17) Cap |
| (3) Stabilizer bushing | (18) Washer |
| (4) Clamp | (19) Crossmember |
| (5) Floating bushing | (20) Cap |
| (6) Stopper | (21) Strut mount |
| (7) Stabilizer link | (22) Spring seat |
| (8) Rear lateral link | (23) Rubber seat upper |
| (9) Bushing (C) | (24) Dust cover |
| (10) Bushing (A) | (25) Coil spring |
| (11) Front lateral link | (26) Helper |
| (12) Bushing (B) | (27) Rubber seat lower |
| (13) Trailing link rear bushing | (28) Damper strut |
| (14) Trailing link | (29) Self-locking nut |
| (15) Trailing link front bushing | |

Tightening torque: N-m (kg-m, ft-lb)

- T1: 20±6 (2.0±0.6, 14.5±4.3)**
T2: 25±7 (2.5±0.7, 18.1±5.1)
T3: 44±6 (4.5±0.6, 32.5±4.3)
T4: 59±10 (6.0±1.0, 43±7)
T5: 98±15 (10.0±1.5, 72±11)
T6: 98±20 (10.0±2.0, 72±14)
T7: 113±15 (11.5±1.5, 83±11)
T8: 127±20 (13.0±2.0, 94±14)
T9: 137±20 (14.0±2.0, 101±14)
T10: 196⁺³⁹/₋₁₀ (20.0^{+4.0}/_{-1.0}, 145⁺²⁹/₋₇)