



15. Front Fog Light Assembly

A: REMOVAL

- 1) Disconnect the ground cable from battery.
- 2) Disengage two clips, and then turn over the lower mud guard.

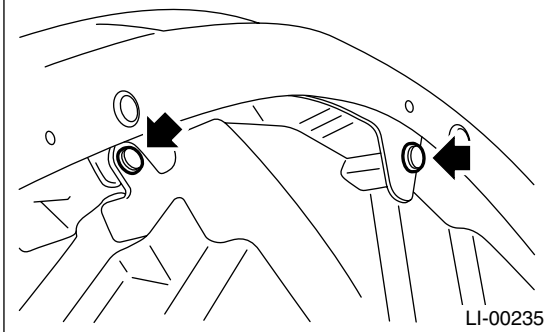

- 3) Disconnect the harness connector.
- 4) Remove the mounting bolts, and then remove the fog light assembly.

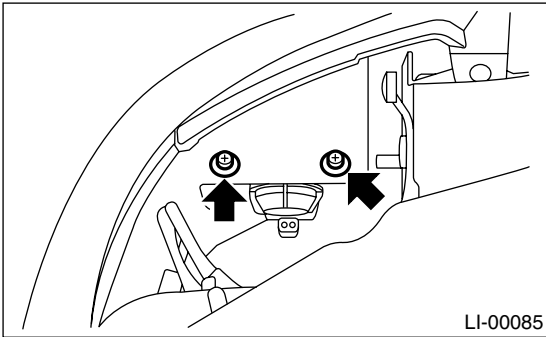

B: INSTALLATION

Install in the reverse order of removal.