


3. Cruise Control Module


A: REMOVAL

- 1) Disconnect the ground cable from battery.
- 2) Remove the side sill front cover.

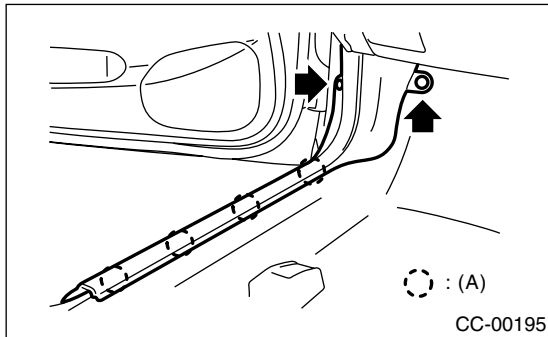

(A) Hook pawl

- 3) Disconnect the connector from cruise control module.
- 4) Remove the bolt, then detach the cruise control module (A).

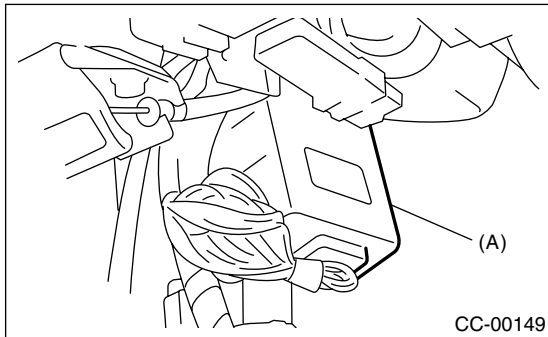

B: INSTALLATION

Install in the reverse order of removal.