

GENERAL

WHEEL AND TIRE SYSTEM

1. General


According to the model grade, the tire size is either of the following three types: P195/60R15, P205/55R16 or 225/45R17.

Steels wheels are provided with a full wheel cap, and aluminum wheels are provided with a center cap.


Four types of disk wheels are provided for model grades.

A: TIRE & WHEEL


Specifications		Tire size	Rim size	Aluminum / steel
Front and rear	TS	P195/60R15 87H	15×6JJ	Steel (A)
	RS, WRX, OUTBACK	P205/55R16 89H	16×6 1/2JJ	Steel (B), aluminum (C)
	STi	225/45R17 90W	17×7 1/2JJ	Aluminum (D)




(A)



(B)



(C)



(D)

WT-00036

(A) Steel wheel for TS

(B) Steel wheel for RS and WRX

(C) Aluminum wheel for OUTBACK


(D) Aluminum wheel for STi

WT-2

GENERAL

WHEEL AND TIRE SYSTEM

Size	A mm	B mm (in)	C mm	D		E mm
				mm	Hole	
15×6JJ	Ø380.2	152.0 (6)	55	Ø100	5	Ø56
16×6 1/2JJ	Ø405.6	165.5 (6.5)	48	Ø100	5	Ø56
16×6 1/2JJ	Ø405.6	165.5 (6.5)	55	Ø100	5	Ø56
17×7JJ	Ø436.6	178.0 (7)	55	Ø100	5	Ø56
17×7 1/2JJ	Ø436.6	190.5 (7.5)	53	Ø100	5	Ø56

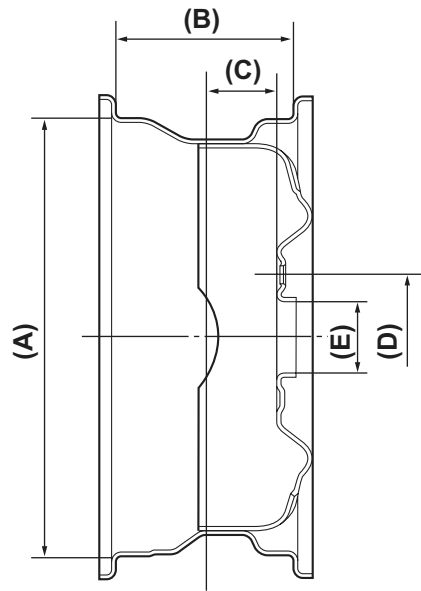

WT-00031

- (A) Rim diameter
- (B) Rim width
- (C) Offset

- (D) P.C.D. (bolt hole pitch circle diameter)
- (E) Center hole diameter


WT-3

GENERAL

WHEEL AND TIRE SYSTEM

B: WHEEL CAP

Steels wheels are provided with a wheel cap.




(A) WT-00037

(A) Wheel cap for 15 × 6JJ

C: SPARE TIRE


A light and compact temporary type spare tire is equipped on all models.

Specifications	Tire size	Rim size
T-type tire	T135/70D16 100M	16 × 4T
	T155/70D17 102M	17 × 4T

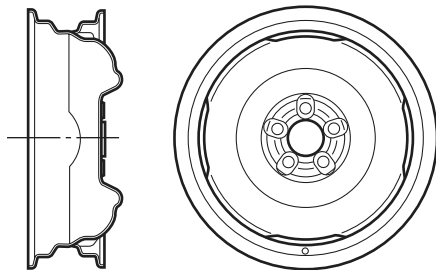

(A)

(A) 16 × 4T

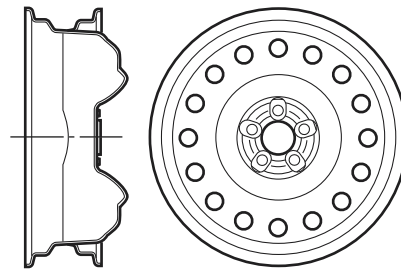

(B)

WT-00038

(B) 17 × 4T

WT-4