

REAR WIPER AND WASHER


WIPER AND WASHER SYSTEMS

2. Rear Wiper and Washer

A: GENERAL

1. REAR WIPER

- 1) The rear wiper operates intermittently at a 10-second interval.
- 2) The rear wiper operates over a 168-degree angle.

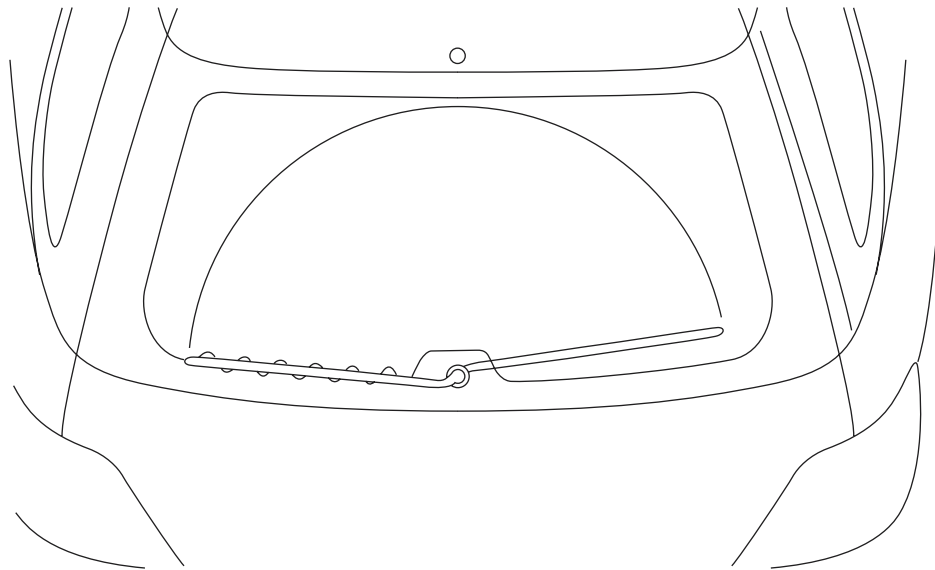

2. REAR WASHER SYSTEM

- 1) The same washer tank is shared by the front and rear washer systems.
- 2) The washer motor and pump unit is installed at the bottom of the washer tank, adjacent to the front washer's unit.
- 3) The washer nozzle is installed on the upper portion of rear gate panel. The nozzle has two spray holes.
- 4) The washer nozzle is provided with a check valve which is located just below it.

3. SPECIFICATIONS

Wiper motor	Rated voltage	12 V
	No-load current	2 A or less
	Speed [at 0.5 N·m (5 kg-cm, 4.3 in-lb)]	25 rpm or more
	Locked rotor current	13 A or less
Wiper blade	Length	375 mm (14.76 in)

WW-6