


---

Washer Fluid Concentration	Freezing Temperature
30%	10.4°F (-12°C)
50%	-4 °F (-20°C)
100%	-49°F (-45°C)

---

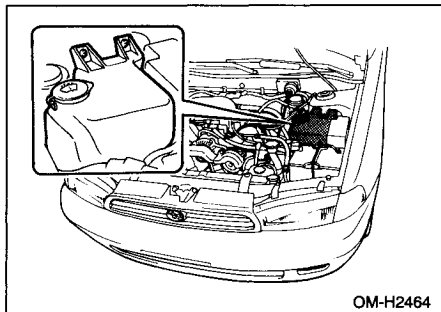

## Replacement of windshield wiper blades

Grease, wax, insects, or other material on the windshield or the wiper blade results in jerky wiper operation and streaking on the glass. If you cannot remove these streaks after operating the windshield washer or if the wiper operation is jerky, clean the outer surface of the windshield (or rear window) and the wiper blades using a sponge or soft cloth with a neutral detergent or mild-abrasive cleaner. After cleaning, rinse the windshield and wiper blades with clean water. The windshield is clean if beads do not form when you rinse the windshield with water.




### **CAUTION**


**Do not clean the wiper blades with gasoline or a solvent, such as paint thinner or benzene. This will cause deterioration of the wiper blades.**

If you cannot eliminate the streaking even after following this method, replace the wiper blades using the following procedures:


1. Remove the wiper blade by holding its pivot area and pushing it in the direction shown by the arrow while depressing the wiper blade stopper.

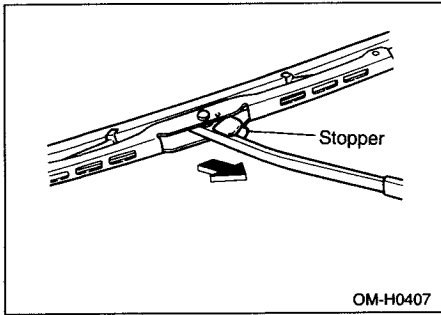

2. Pull out the blade rubber assembly while depressing the stoppers on the rubber.

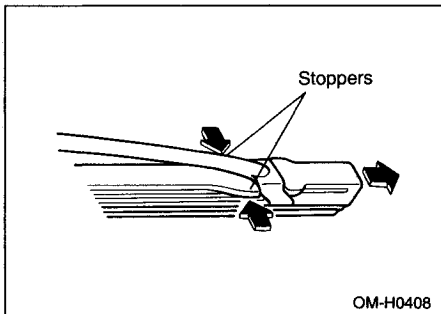

3. Install the new blade rubber assembly, aligning the claws of the blade with the grooves in the rubber.

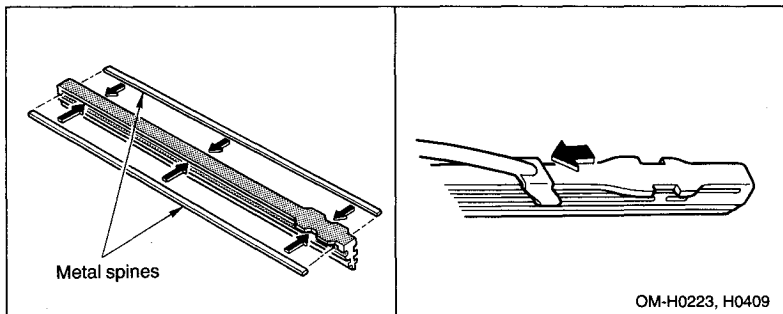

4. Be sure to position the end of the wiper blade between the stoppers on the rubber as shown. If the rubber is not retained properly, the wiper blade may scratch the windshield.

