

1. Wheels and Axles

A: SPECIFICATIONS

1. TIRE AND WHEEL SIZE

		Tire size	Rim size	Rim offset mm (in)	P.C.D. mm (in)
Except OUTBACK model	Front and Rear	P185/70R14 87S	14 x 5 1/2JJ	55 (2.17)	100 (3.94) dia.
		P195/60R15 87H	15 x 6JJ	55 (2.17)	
	T-type tire	T125/70D15	15 x 4T	53 (2.09)	
		T135/70D16	16 x 4T	50 (1.97)	
OUTBACK model	Front and Rear	P205/70R15 95S	15 x 6JJ	55 (2.17)	
	T-type tire	T135/80D16	16 x 4T	50 (1.97)	


NOTE: "T-type" tire for temporary use is supplied as a spare tire.

2. TIRE INFLATION PRESSURE

		Tire size	Tire inflation pressure kPa (kg/cm ² , psi)		
			Light load	Full load	Trailer towing
Except OUTBACK model	Front and Rear	P185/70R14 87S P195/60R15 87H	Ft: 220 (2.2, 32) Rr: 210 (2.1, 30)		—
	T-type tire	T125/70D15 T135/70D16	420 (4.2, 60)		
OUTBACK model	Front and Rear	P205/70R15 95S	Ft: 200 (2.0, 29) Rr: 190 (1.9, 28)		Ft: 200 (2.0, 2.9) Rr: 220 (2.2, 32)
	T-type tire	T135/80D16	420 (4.2, 60)		


3. FRONT DRIVE SHAFT ASSEMBLY

Type of drive shaft assembly	SHAFT	DOJ	FTJ
	No. of identification paddings on shaft	No. of spline teeth	No. of spline teeth
87AC-DOJ	1 (One)	25	—
87AC-FTJ	0 (None)	—	25
95AC-DOJ	3 (Three)	25	—

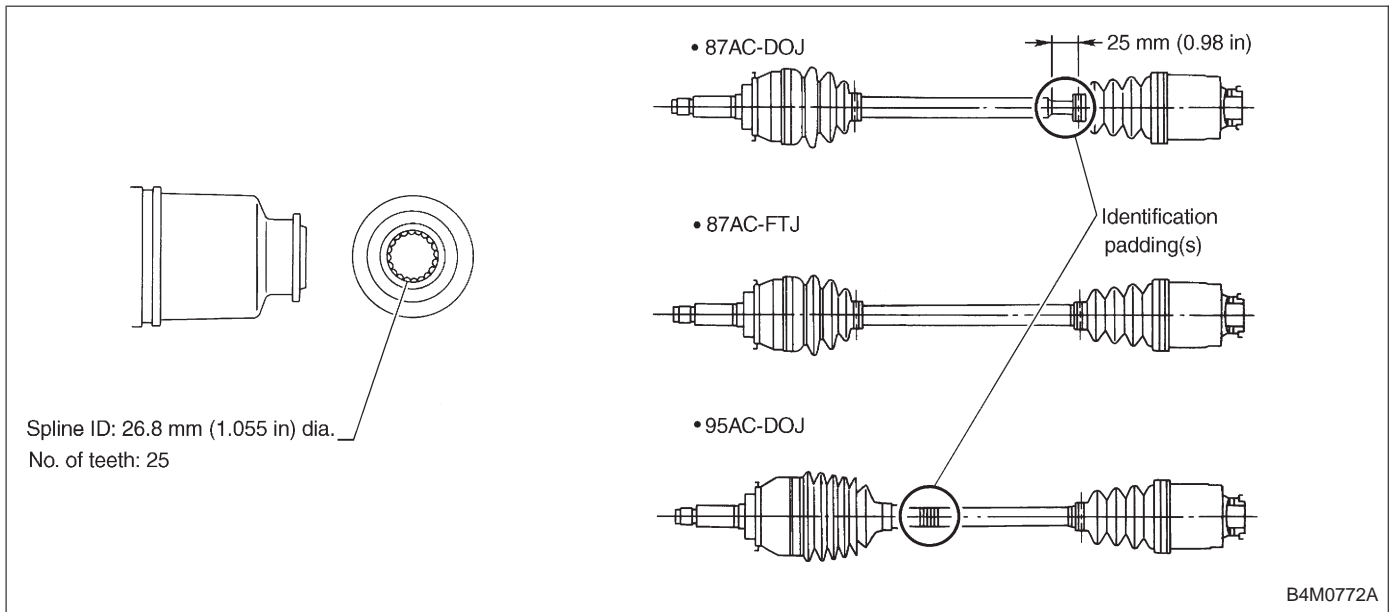

4. REAR DRIVE SHAFT ASSEMBLY (AWD MODEL)

Type of drive shaft assembly	SHAFT
	No. of identification paddings on shaft
79AC-RH	1 (One)
79AC-LH	1 (One)

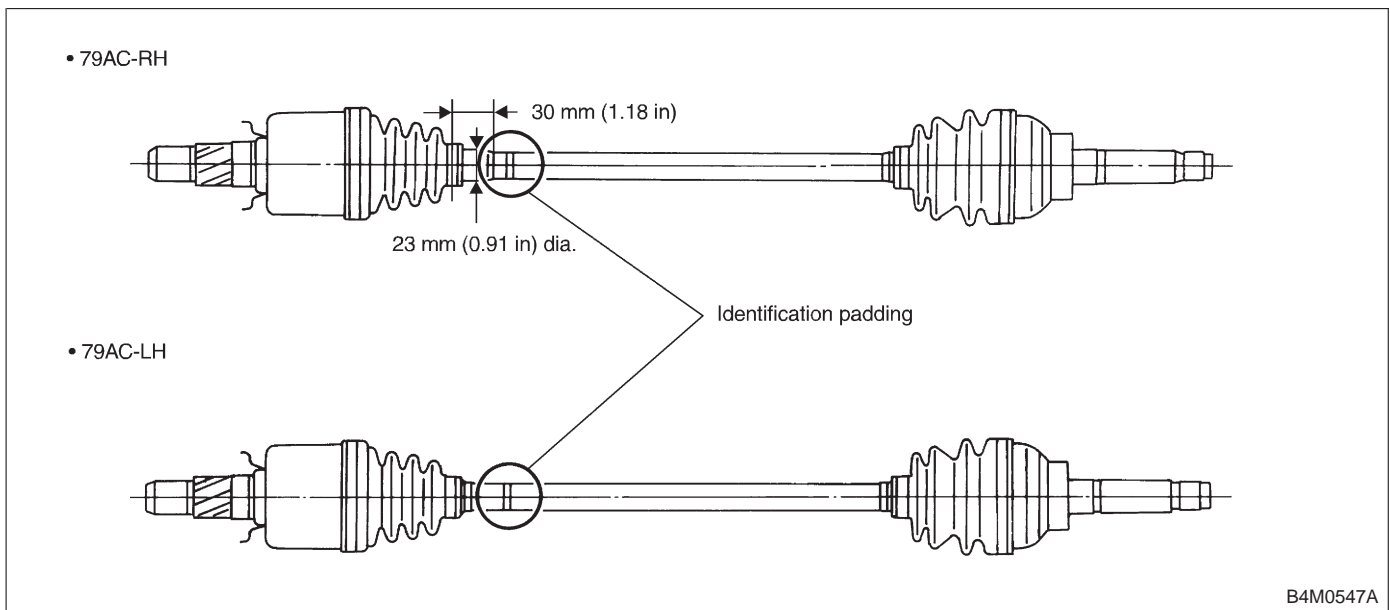

5. APPLICATION TABLE

Model	Power unit	Front drive shaft		Rear drive shaft
		5MT	4AT	
FWD	2200 cc	95AC-DOJ	87AC-DOJ	—
AWD	2200 cc	87AC-DOJ	87AC-DOJ	79AC-RH, 79AC-LH
AWD	2500 cc	—	87AC-FTJ	79AC-RH, 79AC-LH

B: SERVICE DATA

Wheel balancing	Standard	Service limit
Dynamic unbalance	Less than 5 g (0.18 oz)	

Balance weight part number (For steel wheel)	Weight g (oz)
28101AA001	5 (0.18)
28101AA011	10 (0.35)
28101AA021	15 (0.53)
28101AA031	20 (0.71)
28101AA041	25 (0.88)
28101AA051	30 (1.06)
28101AA061	35 (1.23)
28101AA071	40 (1.41)
28101AA081	45 (1.59)
28101AA091	50 (1.76)
28101AA101	55 (1.94)
28101AA111	60 (2.12)

Balance weight part number (For aluminum wheel)	Weight g (oz)
23141GA462	5 (0.18)
23141GA472	10 (0.35)
23141GA482	15 (0.53)
23141GA492	20 (0.71)
23141GA502	25 (0.88)
23141GA512	30 (1.06)
23141GA522	35 (1.23)
23141GA532	40 (1.41)
23141GA542	45 (1.59)
23141GA552	50 (1.76)
—	55 (1.94)
23141GA572	60 (2.12)