

Fuel filler lid and cap

WARNING


- Gasoline vapor is highly flammable. Before refueling, always first stop the engine and make sure that there are no lighted cigarettes, open flames or electrical sparks in the adjacent area.
- When opening the cap, do not remove the cap quickly. Fuel may be under pressure and spray out of the fuel filler neck especially in hot weather, which may cause injury.


CAUTION

Never add any cleaning agents to the fuel tank. The addition of a cleaning agent may cause damage to the fuel system.

For choosing the right fuel for your SUBARU, refer to the Fuel Requirements section (chapter 7).

■ Fuel filler lid release

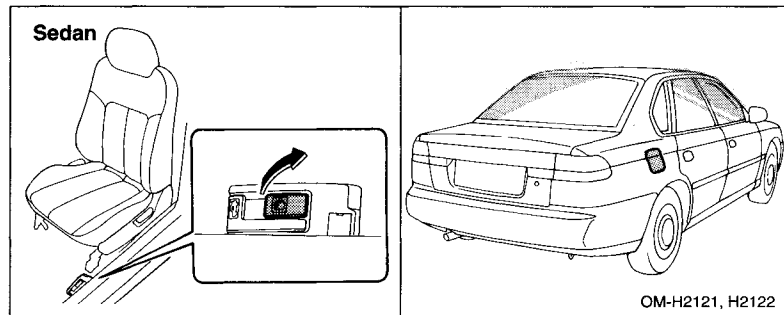

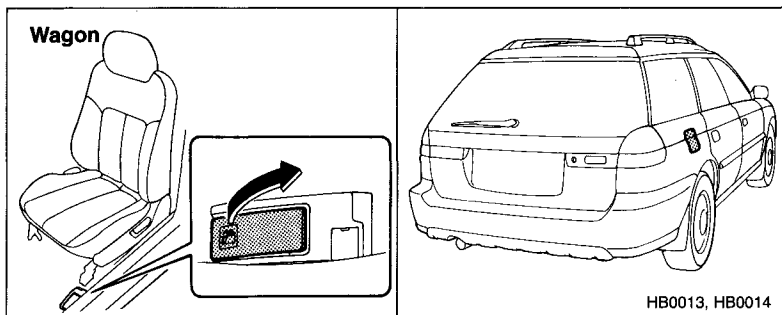


To open the fuel filler lid, pull the lid release lever up.

■ Fuel filler cap

⚠ CAUTION

- Make sure that the cap is tightened securely to prevent fuel spillage in the event of an accident.
- Always use a genuine SUBARU fuel filler cap. If you use the wrong cap, it may not fit or have proper venting, and your fuel tank and emission control system might be damaged.

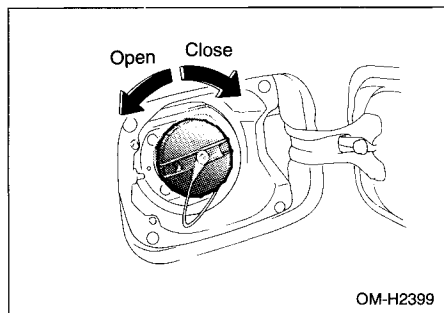

To take off the fuel filler cap, turn it counterclockwise slowly and remove the cap.

To put the cap back on, turn it clockwise until you hear a clicking noise.

– CONTINUED –

■ Refueling

After the fuel filler nozzle has automatically stopped, do not add more fuel.

If you spill any fuel on the painted surface, wipe it off immediately. Otherwise, the painted surface could be damaged.

Engine hood

WARNING

Always check that the hood is properly locked before you start driving. If it is not, it might fly open while the vehicle is moving, blocking your view which may cause an accident and serious bodily injury.

