

3. Insert the wrench in the end of the motor shaft.


- To lower the sunroof, turn the wrench clockwise.
- To close the sunroof, turn the wrench counterclockwise.

Have your vehicle checked by an authorized SUBARU dealer.

Roof rail (if equipped)

⚠ CAUTION

- For cargo carrying purpose, the roof rail must be used together with a roof cross bar kit. The roof rail must never be used alone to carry cargo. Otherwise, damage to the roof or paint or a dangerous road hazard due to loss of cargo could result.
- When using the roof cross bar kit, make sure that the total carrying capacity of the roof cross bar kit and luggage does not exceed 100 lb. (45 kg). Overloading may cause damage to the vehicle and create a safety hazard.

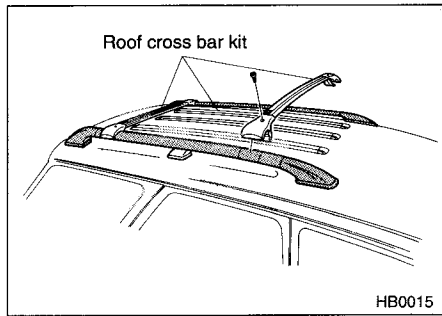

Luggage can be carried on the roof after securing the roof cross bar kit to the roof rail. When installing the roof cross bar kit on the roof rail, follow the manufacturer's instructions. The roof cross bar kit is designed to carry loads (luggage and roof rack) of not more than 100 lb. (45 kg).