

18. Trailer Hitch


A: REMOVAL AND INSTALLATION

- 1) Lift-up the vehicle.
- 2) Disconnect rubber cushion from body.

NOTE:

To facilitate removal, apply a coat of SUBARU CRC to mating area of rubber cushions in advance.


SUBARU CRC (Part No. 004301003)

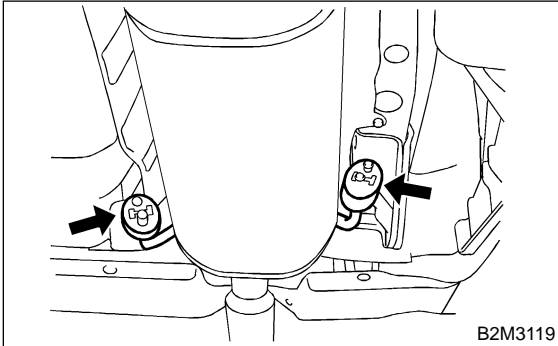

- 3) Cut the strap (a).
- 4) Remove bolts and then detach trailer hitch while lowering the muffler.

CAUTION:


Two people are required to do this procedure.

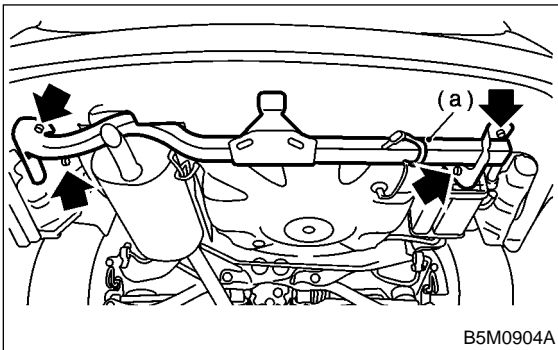

- 5) Installation is in the reverse order of removal.

NOTE:

- Securely fasten trailer hitch harness using a strap.
- Be sure to set the bolt in position as shown in the figure.

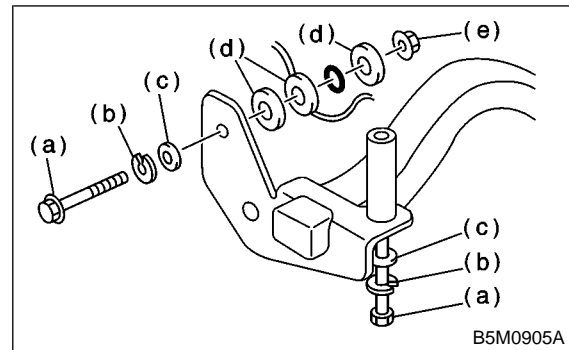

- (a) Bolt
- (b) Spring washer
- (c) Flat washer
- (d) Plate
- (e) Nut

Tightening torque:

68 N·m (6.9 kg·m, 50 ft·lb)