

6. Built-in Child Restraint


A: REMOVAL AND INSTALLATION

1. RETRACTOR ASSEMBLY


WARNING:

Replace the built-in child restraint equipped vehicle seatback assembly if the child restraint was in use during a serious collision. The built-in restraint may be severely weakened. In a subsequent accident, it might not be able to provide adequate protection. The entire assembly should be replaced even if damage is not obvious.


- 1) Detach mat and then remove nuts and screws from back panel (a).
- 2) Detach back panel while removing webbing of built-in child restraint.

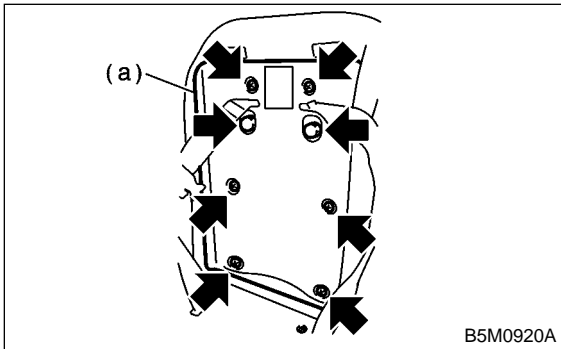

- 3) Remove screws and then detach cushion board (a).

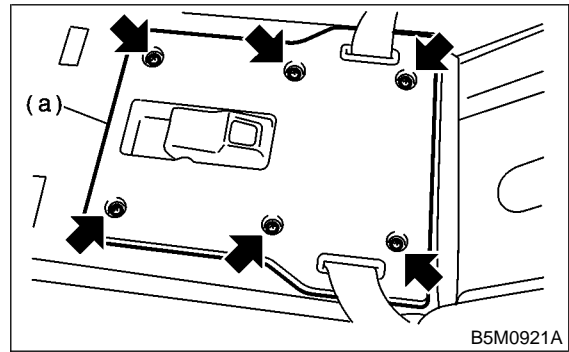

- 4) Remove screws and then detach retractor assembly (a).

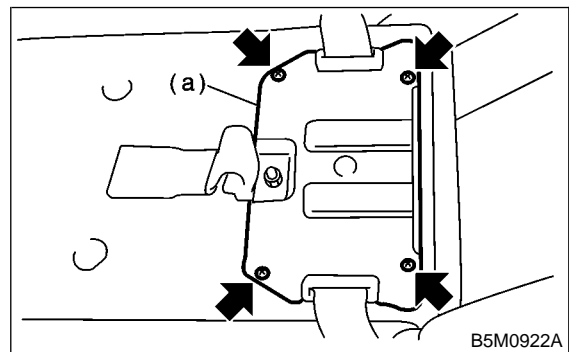

- 5) Installation is in the reverse order of removal.