


1. Front Suspension

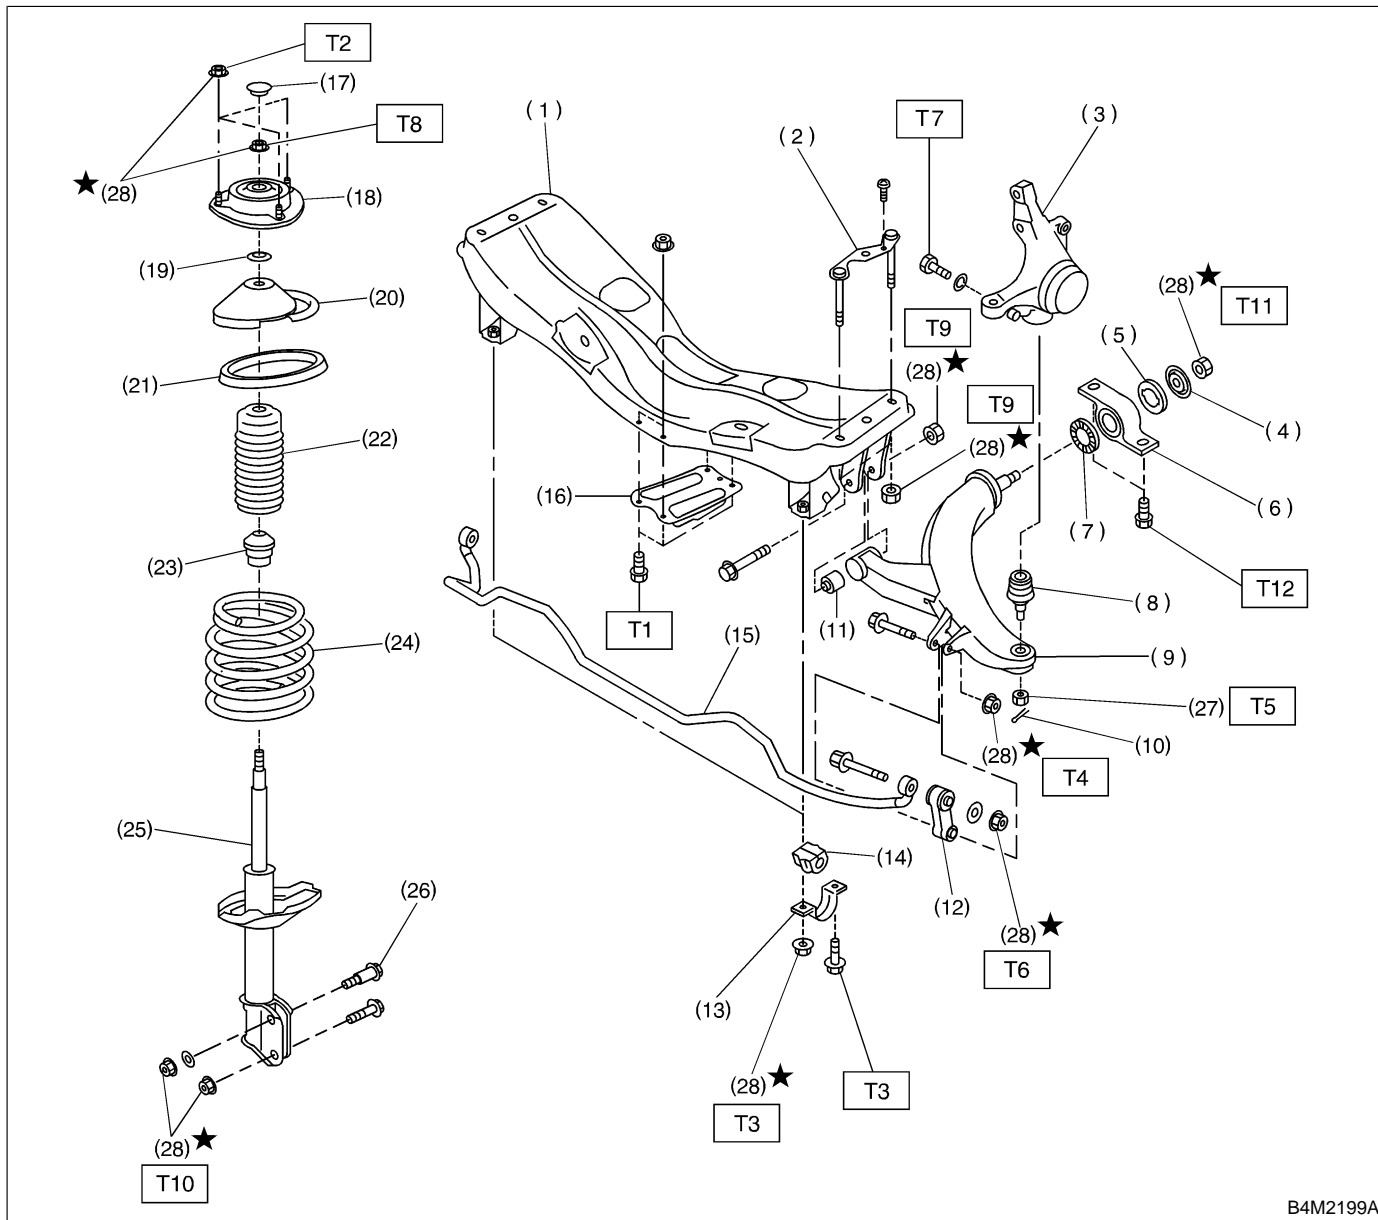

B4M2199A

- | | |
|----------------------------|------------------------|
| (1) Front crossmember | (16) Jack-up plate |
| (2) Bolt ASSY | (17) Dust seal |
| (3) Housing | (18) Strut mount |
| (4) Washer | (19) Spacer |
| (5) Stopper rubber (Rear) | (20) Upper spring seat |
| (6) Rear bushing | (21) Rubber seat |
| (7) Stopper rubber (Front) | (22) Dust cover |
| (8) Ball joint | (23) Helper |
| (9) Transverse link | (24) Coil spring |
| (10) Cotter pin | (25) Damper strut |
| (11) Front bushing | (26) Adjusting bolt |
| (12) Stabilizer link | (27) Castle nut |
| (13) Clamp | (28) Self-locking nut |
| (14) Bushing | |
| (15) Stabilizer | |

Tightening torque: N-m (kg-m, ft-lb)

- T1: 18±5 (1.8±0.5, 13.0±3.6)**
T2: 20±6 (2.0±0.6, 14.5±4.3)
T3: 25±4 (2.5±0.4, 18.1±2.9)
T4: 29±5 (3.0±0.5, 21.7±3.6)
T5: 39 (4, 29)
T6: 44±6 (4.5±0.6, 32.5±4.3)
T7: 49±10 (5.0±1.0, 36±7)
T8: 54±5 (5.5±0.5, 39.8±3.6)
T9: 98±15 (10.0±1.5, 72±11)
T10: 177±20 (18±2, 130±14)
T11: 186±10 (19.0±1.0, 137±7)
T12: 245±49 (25.0±5.0, 181±36)