


22. Spot Light S914398

A: REMOVAL S914398A18

1) Remove lens (A) and spot light mounting screw (B).

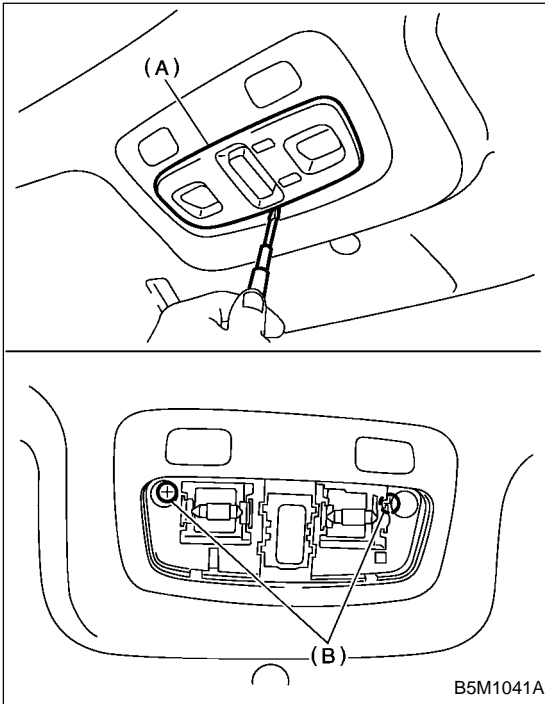

2) Disconnect harness connectors and remove spot light.

B: INSTALLATION S914398A11

Install in the reverse order of removal.

C: INSPECTION S914398A10

Check continuity between terminals.

Switch position	Tester connection	Specified condition
OFF	—	No continuity
ON	1 - 2	Continuity