


### 3. Horn S904437

#### A: REMOVAL S904437A18

- 1) Disconnect ground cable from battery.
- 2) Remove horn bracket mounting bolt (A).
- 3) Disconnect harness connector and remove horn assembly (B).

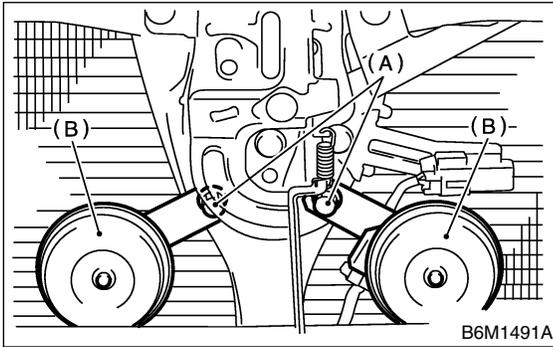

#### B: INSTALLATION S904437A11

Install in the reverse order of removal.

#### C: INSPECTION S904437A10

With 12 V direct current supply between horn terminal and case ground, check that the horn sounds properly.

