


## 10. Speaker Amplifier S901613

### A: REMOVAL S901613A18

- 1) Disconnect ground cable from battery.
- 2) Remove passenger's seat. <Ref. to SE-7, REMOVAL, Front Seat.>
- 3) Disconnect harness connector.
- 4) Remove mounting nuts, and then detach speaker amplifier.

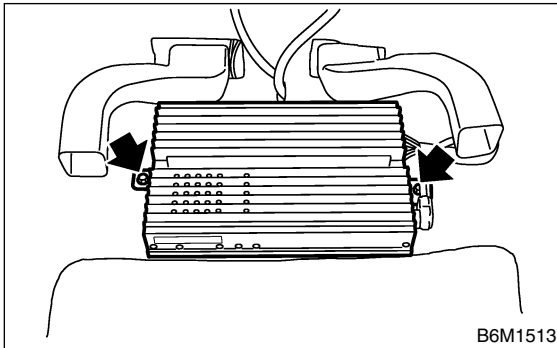

### B: INSTALLATION S901613A11

Install in the reverse order of removal.