


18. Back-up Light Bulb S914424

A: REMOVAL S914424A18

1. SEDAN S914424A1801


- 1) Open trunk lid and remove cover.

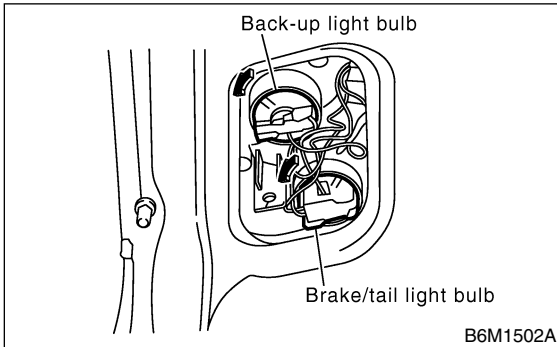

- 2) Turn the socket and remove the bulb.

2. WAGON S914424A1802

- 1) Open rear gate lower trim cover.

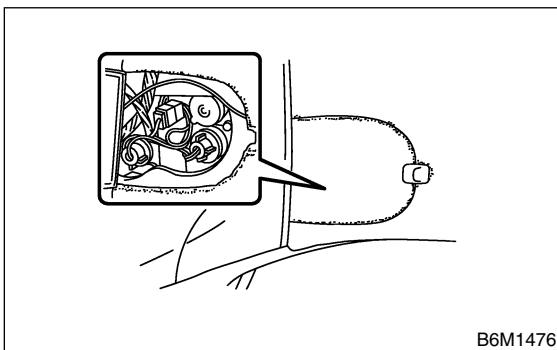

- 2) Turn the socket and remove the bulb.

B: INSTALLATION S914424A11

Install in the reverse order of removal.

C: INSPECTION S914424A10

- 1) Visually check the bulb for blow out.
- 2) Check the bulb specification. <Ref. to LI-2, SPECIFICATIONS, General Description.>
- 3) If NG, replace the bulb with a new one.