


23. Security Horn S909333

A: REMOVAL S909333A18

- 1) Disconnect ground cable from battery.
- 2) Remove bolt and then detach security horn while disconnecting connector.

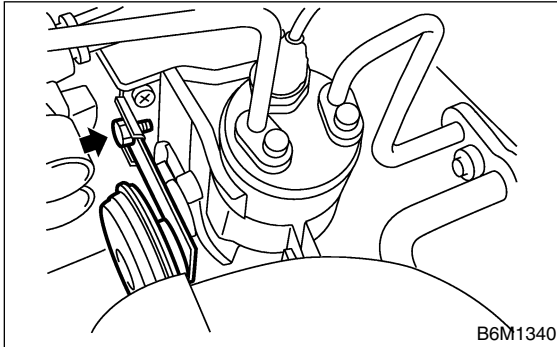


B: INSTALLATION S909333A11

Install in the reverse order of removal.

C: INSPECTION S909333A10

Connect the battery to the security horn terminal and case ground and make sure the horn sounds properly.

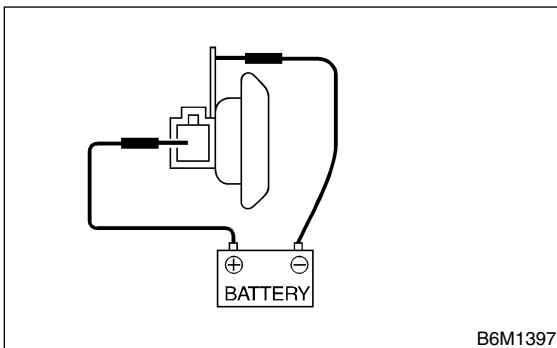

If NG, replace the security horn.