

WOOFER

ENTERTAINMENT

9. Woofer


A: REMOVAL

1. SEDAN


- 1) Disconnect ground cable from battery.
- 2) Remove rear shelf trim. <Ref. to EI-48, Removal, Rear Shelf Trim.>
- 3) Remove woofer mounting screws.
- 4) Disconnect harness connector, and then remove woofer.

2. WAGON

- 1) Disconnect ground cable from battery.
- 2) Remove hook (A) and then remove trim of woofer.

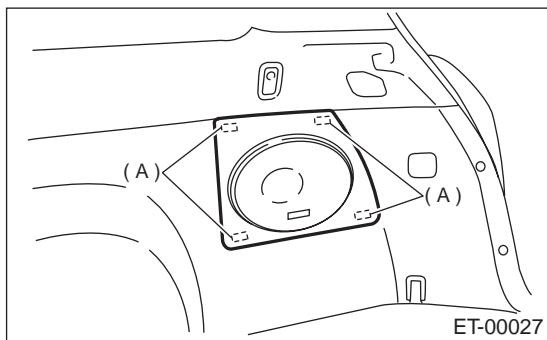

- 3) Remove woofer mounting screws.

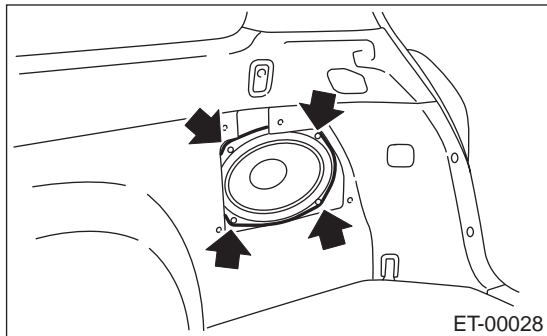

- 4) Disconnect harness connector, and then remove woofer.

B: INSTALLATION

Install in the reverse order of removal.