


10. Speaker Amplifier

A: REMOVAL

- 1) Disconnect ground cable from battery.
- 2) Remove passenger's seat. <Ref. to SE-7, REMOVAL, Front Seat.>
- 3) Disconnect harness connector.
- 4) Remove mounting nuts, and then detach speaker amplifier.

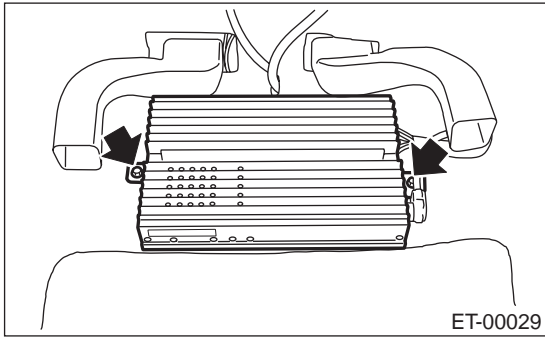

B: INSTALLATION

Install in the reverse order of removal.