


23. Wiper Deicer Switch

A: REMOVAL

Remove driver side switch panel, and then remove wiper deicer switch.

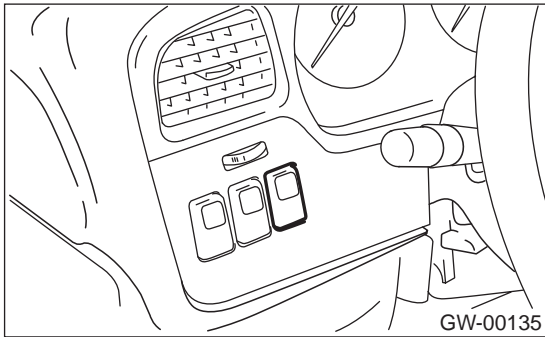

B: INSTALLATION

Install in the reverse order of removal.

C: INSPECTION

Move wiper deicer switch to each position and check continuity between terminals.

Switch position	Terminal No.	Standard
OFF	—	More than 1 MΩ
ON	3 and 5	Less than 1 Ω

If NG, replace the switch.

WIPER DEICER SWITCH

GLASS/WINDOWS/MIRRORS

MEMO: