

## REAR WIPER AND WASHER


Wiper and Washer Systems

### 2. Rear Wiper and Washer

#### A: DESCRIPTION

##### 1. REAR WIPER

- 1) The rear wiper operates intermittently at a 10-second interval.
- 2) The rear wiper operates over a 168-degree angle.

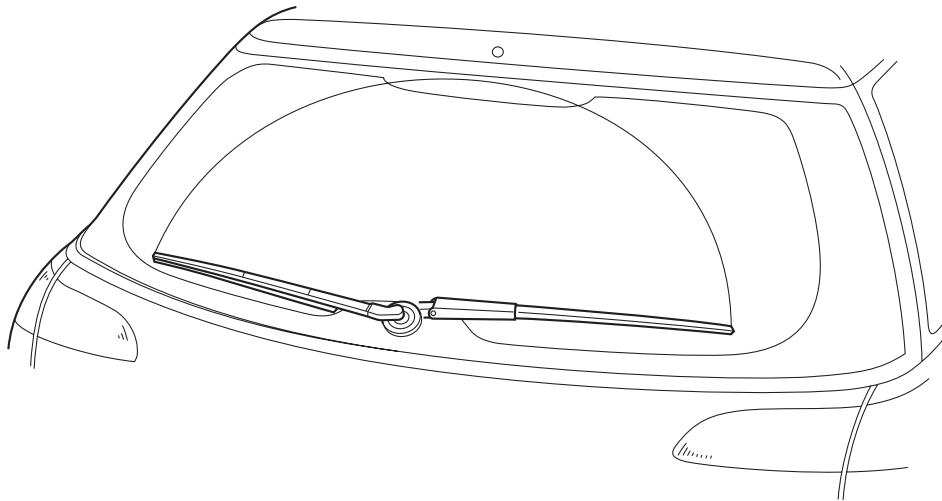

WW-00104

- 3) The wiper blade is attached to the arm by means of a U-hook joint in the same way as with the front wipers.

##### 2. REAR WASHER SYSTEM

- 1) The same washer tank is shared by the front and rear washer systems.
- 2) The rear washer motor and pump unit is installed at the bottom of the washer tank, adjacent to the front washer's unit.
- 3) The washer nozzle is installed on the upper portion of rear gate panel. The nozzle has two spray holes.
- 4) The washer nozzle is provided with a check valve which is located just below it.

##### 3. SPECIFICATION

Wiper Motor	Rated voltage	12 V
	No-load current	2 A or less
	Speed [at 0.5 N·m (5 kg cm 4.3 in-lb)]	30 ± 5 rpm or more
	Locked rotor current	13 A or less
Wiper Blade	Length	375 mm (14.76 in)